unfurl

Unfurl brand kit: Fern, share cards, app reviews and campaign

Design proposal for Kai, revised 3 November 2026 after his review. Mockups only; no app code has changed. Drawn with the locked Unfurl design system (ADR-0019, ADR-0028): Geist type, moss as the one brand colour, the flat fiddlehead logo, and Fern as the only gradient in the interface. New in this round: a drawing language of hand-drawn lines that depict ferns, vines and leaves, used for backgrounds, charts, badges and Fern's face; no boxes on any card; every card that has data shows it as a chart. Share cards use the post ratios the crop editor is being built for: 4:5 and 1:1 posts and 9:16 stories.

Round 4: Fern in the app and the campaign, to approve

1 **The logo is Unfurl's; Fern is the chat character.** *Ruled by Kai, 3 November 2026.* The flat fiddlehead mark with the wordmark signs everything Unfurl publishes: app icon, share-card footers, posts, website, social profiles. Fern (C1, the wreath sprite) appears only where the companion acts: chat, the daily and weekly reviews, "Ask Fern" answers, the centre tab that opens chat, and as an illustration inside campaign art.

2 **Share cards keep the Unfurl logo in the footer.** *Corrected after Kai's ruling:* the version 6 proposal to put Fern in every card footer, celebrating on win cards, is withdrawn. Cards carry no Fern.

3 **Fern explains a chart only when asked.** Each Stats chart gets an "Ask Fern about this" link; nothing is computed or shown until it is tapped, so Stats stays a page of charts (the house rule: no standing assistant panel on a dashboard). The answer names how many records and which dates it read.

4 **Daily review, proposed as its own screen:** opens from the 9 pm reminder or from Today once everything is logged. The day as one frond (a leaf per thing done, an outline per miss), Fern's two sentences, each miss with its cost and its next step, one line to reflect, Share and Done.

5 **Weekly review gets Fern on top:** the existing Life Score, on-target days and areas, plus Fern's two sentences naming the strongest and weakest area with numbers, the week's wins as badges, and up to two suggestions the user adds with one tap (a budget, a habit). Share recap stays.

6 **Fern's voice:** facts first, numbers grouped, one short sentence; celebrates what happened, names the cost of a miss without blame, never says "AI", never hypes. The table under "Fern in the brand" is the rule.

7 **The campaign leads with pain, then the fix:** six selling points, each tied to a pain in the user's words and to proof in the app. Materials: six pain → fix posts, a price comparison, a before-and-after, a campus square, a three-part story ad, a 15-second storyboard and a landing page.

8 **Prices in ads are US list prices** from the positioning document (US$311 for the five-app stack, US$49.99 a year for Plus). Philippine ads need the regional Plus price set first; until then the PH versions say "Free to start" and drop the comparison.

▼ Round 3 decisions, approved by Kai on 3 November 2026

1 **Fern becomes a character: C1, the wreath sprite.** *Chosen by Kai on 3 November 2026.* A small round being whose body is the gradient orb, a fiddlehead curl growing from its head, two leaflet arms, living inside the wreath seal. Keeps the orb and gradient ADR-0019 gives Fern alone. ADR-0019 amendment, corrected 3 November after Kai's ruling: "The logo and app icon are Unfurl's flat fiddlehead mark and wordmark. Fern is a separate character, the orb with a face inside a wreath of two fronds, used only where the companion acts; Fern is never the logo or a signature." This replaces ADR-0019's earlier line that made the logo Fern's face.

2 **Seven animations, all in the line language:** *Approved.* arrives (wreath draws on, body grows, curl rolls up, eyes open: 1.6 s), idle (breathes 3.6 s, blinks every 4.2 s), listening (eyes lift, wreath leans in, an arm cups to listen), thinking (wreath and curl draw themselves on, 2.4 s loop), speaking (mouth, arm gesture, halo), a win (hop, arms up, curl unfurls, leaves lift) and a miss (wreath droops, one leaf falls, eyes soften). Transform, opacity and stroke drawing only; all stop under reduced motion.

3 **A miss gets its own Fern state.** *Approved.* Under the rewarding-feedback rule a missed habit or a broken streak shows its cost; Fern consoles instead of cheering, beside the plain cost line ("Streak ended at 23 days").

4 **Generated art is reference, the app draws vectors.** *Approved.* Antigravity's images set the character; the shipping Fern is the vector drawing shown here, so it scales from 24 to 200 px, follows light and dark, and animates.

▼ Round 2 decisions, approved by Kai on 3 November 2026

1 **The brand draws in lines:** hand-drawn strokes that depict ferns, vines and leaves become Unfurl's illustration language. They appear as faint backgrounds on share cards, as the shape of the charts (stems, leaves, a growing vine), on the trophy badges and in Fern's face. New tokens `share-line` (the stroke colour) and `share-line-opacity` 20%.

2 **No boxes on a card:** no bordered stat tiles, no outlined chips, no pills used as containers, no accent bar over the title. A change is coloured text with an arrow beside its number; a win is one line with a drawn sprig; figures sit on the ground over their labels.

3 **Unfurl's own type on every card:** Geist for words and numbers. Hero numbers are Geist 600 tracked −4.5%, the way the wordmark is tracked, with tabular figures so digits line up. Geist Mono leaves the share artwork: at 48–96 pt its fixed-width digits spread out ("1 4 2 . 5"). The app keeps Geist Mono for numbers in rows.

4 **Every card that has data draws it:** volume per exercise as stems with one leaf per set; streaks as a calendar of leaves; week and month recaps as day stems with a leaf on each on-target day; records as a vine line with the previous best dashed; pace per kilometre on runs; savings against the plan.

5 **Life Score: six leaves, not a hexagon.** One leaf per area, its length the area's score, a dashed outline for 100. The score ring goes too; the number is the hero.

6 **Trophies and wins get a badge set:** eight hand-drawn badges (personal best, new record, streak, goal hit, first time, day sealed, milestone, savings goal), each one emblem inside a wreath of two fronds. The trophy card centres its badge.

7 **One canvas and one anatomy:** 360 pt wide, exported at 3× (1,080 px). Header, title, hero with its change, one win line, figures, one chart, lockup bottom-left. Story content stays inside an 88 pt top and 120 pt bottom safe zone.

8 **Numbers are grouped and never shortened** up to 7 digits ("1,248,210 kg", not "1.2M"). A long hero steps down a size instead.

9 **Fit rule:** when a card runs out of room, list rows give way first (into "+N more"), then the chart, then figures, the win line and the sub line. Title and hero never drop or shrink.

10 **Misses show their cost** in the bad colour beside the wins: a crossed day, an outlined leaf, "Missed Friday: the 9-day run ended at 9."

11 **Plain verdicts and privacy lines off the artwork:** "On fire" and "Locked in" become facts; "Amounts never leave the app" moves to the share sheet. Money cards stay percent-only.

12 **Six new cards:** Run, Trophy, Day sealed, Savings goal reached, Focus, and Profile in 4:5. Four streak cards become one.

13 **Formats match the post frames** from the frame editor (PR #231): 4:5 and 1:1 fill a post exactly; posting a 9:16 card switches it to 4:5 rather than cropping it.

14 **Fern: direction A, a drawn frond in the orb.** *Approved, then superseded in round 3:* Kai asked for Fern to become a character leaning on C, so the choice moves to the round 3 list above. Its proposed ADR-0019 line (the frond as a sibling of the logo mark) is withdrawn: the logo stays Unfurl's and Fern is separate.

15 **Badge art drawn by hand.** *Approved.* Antigravity is now used for Fern's concept art at Kai's request (round 3); a generated pass for the badges is still not planned.

Share cards | Marketing kit | Campaign | Fern | Long data | Self-review

1 · Share cards, redesigned

Today there are 23 card layouts on 6 share screens. They share one frame, but every card sets its own sizes in "percent of width" units (rings from 24 to 58, hero numbers from 3.6 to 34, five different dot-grid widths), so no two streak cards match. The proposal draws every card on one 360 pt canvas with the app's own type, space and colour tokens, exported at 3× (1,080 px wide), and gives all of them one anatomy. Nothing on a card sits in a box: each figure is set by what it means, and the data is drawn.

The drawing language: lines that grow

Unfurl means a fern frond opening. The brand now draws the way a person sketches a plant: one stroke at a time, slightly uneven, never filled shapes or boxes. Four motifs, one rule each.



Frond
A stem with alternating leaflets that shrink toward a fiddlehead curl. Training, goals and the logo.



Vine
A wavy stem with leaves on the crests and the odd tendril. Habits, tasks, journal and focus: things that grow by repetition.



Sprig
Two or three short fronds from a corner. Recaps, money and food.



Leaf
The unit of data: one leaf is one day, one set or one thing done. Filled when done, outlined when not, outlined in the bad colour when missed.

Rule	Why
Stroke only; leaves may fill with a data colour when they carry data	Keeps the illustration calm and the data colourful, as the brand asks ("calm chrome, colourful data")
Backgrounds at 20% in `share-line`, at the card's edges	Never under a number, so contrast is untouched
Every path gets a small fixed wobble and a second fainter pass	Reads as pen on paper; the same seed draws the same picture every time, so exports are stable
The logo stays flat and exact (ADR-0019)	The drawn fronds are its family, not replacements

Layout notes

Why a card is opened: "I open a share card because I want to post a win, so that the people who follow me see what I did and I feel it counted." The second reader is the person scrolling past: "I see this card for under two seconds; I need to know what was done and that it is good."

Tier	What	How it is drawn
Required	What was done (title) and the one number that proves it	Title in `title` (story `page-title`), never truncated; hero in `num-display` New (Geist 600, tracked tight like the wordmark) with its change beside it as coloured text
Supporting	Why it is a win (record, streak, goal) and up to three facts	One win line with a drawn sprig in `share-mark`; up to three figures over `micro` labels, no boxes; one chart, drawn in the line language, that needs no legend
Guiding	Where and when, and that it came from Unfurl	Header line: area icon, kicker, date in `caption`. Footer: flat lockup at left, one quiet fact or handle at right

What changes on every card


Part	Today	Proposed
Units	Percent of card width ("q"): padding 6.5, kicker 3.6, date 3.3, foot 3.0, lockup 4.8	Points on a 360 pt canvas: padding `space-xl` 24, gaps `space-md` 12
Header	Accent bar 8 × 1.2 over the kicker; date style differs per card ("Sat, 1 Nov", "Nov 1 – Nov 7", "Last 30 days", none)	No accent bar. Area icon 16 pt in the area colour, kicker and date in `caption` 13. One date style: "Sat 1 Nov", "27 Oct – 2 Nov", "1–31 Oct"
Title	Sizes 5, 5.4, 6, 7, 8, 9 or 12 q	`title` 20 on posts, `page-title` 28 on stories; wraps, never truncated
Hero	20 different number sizes from 3.6 to 34 q; shrinks to fit, compacts to "1.2M" past 6 characters	Geist 600 tracked −4.5%: `num-display` 64 / `num-display-s` 48 / `num-poster` 96, unit in Geist 500 26 muted; a phrase after the number ("of 31 days on target") sits under it in `sheet-title` 17 muted; grouped up to 7 digits
Delta	Under the hero or in a footer; "vs last wk", "vs prior 30 days", "vs last period"	Coloured text with an arrow beside the hero, Geist 500 15, `good` / `warn` / `bad`; baseline spelled out ("5 more than September"). No outline
Stats	Boxed tiles: panel fill, 1 pt border, radius 3 q	Up to three figures in Geist 600 18 over `micro` 12 labels, standing on the ground with no box, and the detail moves into the chart
Win	A chip like any other chip	One win line per card: a drawn sprig in `share-mark` and the reason the card exists. No pill
Charts	A thin spark line, rings that are always full, a hexagon radar, square dot grids	Drawn in the line language: stems with leaves on the days that hit the mark, a calendar of leaves, a vine line with the previous best dashed, six leaves for the Life Score. Values printed on the chart
Background	A filled fiddlehead watermark at 6%	A hand-drawn frond, vine or sprig in `share-line` at 20%, kept to the edges and never under a number
Footer	Lockup bottom-right; foot text bottom-left on some cards, missing on others	Lockup bottom-left (mark 16 pt in `share-mark`, word Geist 500 14 tracked −3%, as the logo is set); one quiet fact or the handle at right

Part	Today	Proposed
Square 1:1	Each card hides different parts, with different grid widths	One fit rule for every ratio: list rows give way first (into "+N more"), then the list or chart, then figures, win line and sub line; title and hero never drop or shrink
Story 9:16	Same padding as posts; the reply bar covers the lockup on Instagram	Content inside the safe zone: 88 pt top, 120 pt bottom

Tokens the cards use

Token	Value	Use
`num-display` New	Geist 600, 64 / 68, tracking −4.5%, tabular figures	Hero number on 4:5 posts. Share artwork only.
`num-display-s` New	Geist 600, 48 / 52, tracking −4.5%	Hero of 7 or more characters ("182,400", "11 h 20 m"). Square: 56 and 44.
`num-poster` New	Geist 600, 96 / 100, tracking −4.5%	Hero number on 9:16 stories.
`share-canvas` New	360 × 450 / 360 × 360 / 360 × 640 pt, exported at 3×	One coordinate space for every card; replaces percent-of-width units.
`share-safe-top / -bottom` New	88 pt / 120 pt	Story content stays clear of the app's header and reply bar.
`share-line` New	sprout #a6d277 on dark grounds, moss #1f5a43 on paper; drawn at 20%	The hand-drawn fronds, vines and sprigs behind the content.
`share-track` New	ink at 14% on dark grounds, 10% on paper	Dotted tracks under bars and meters; empty leaves.
`share-mark` New	sprout #a6d277 on dark grounds, moss #1f5a43 on paper	Lockup mark, win sprig, record sprig, the leaf on a day that hit the mark. Flat, as ADR-0019 requires.
`share-paper, share-paper-ink`	#f9f5ec, #171717 (exist, unused today)	The light ground.
`title, page-title, caption, micro, detail`	Existing app type tokens (Geist)	Every word on a card.
`space-md, space-xl`	Existing	Gaps and padding.
`hab, tsk, fit, nut, fin, life, foc`	Existing data colours (dark values on dark grounds; life lifted to #d0a032 on dark for contrast)	Icons, stems, leaves and meters only; never text.
`good, warn, bad`	Existing status colours	Changes, misses and target lines, always with an arrow, a cross or a word.

Anatomy, on the workout card

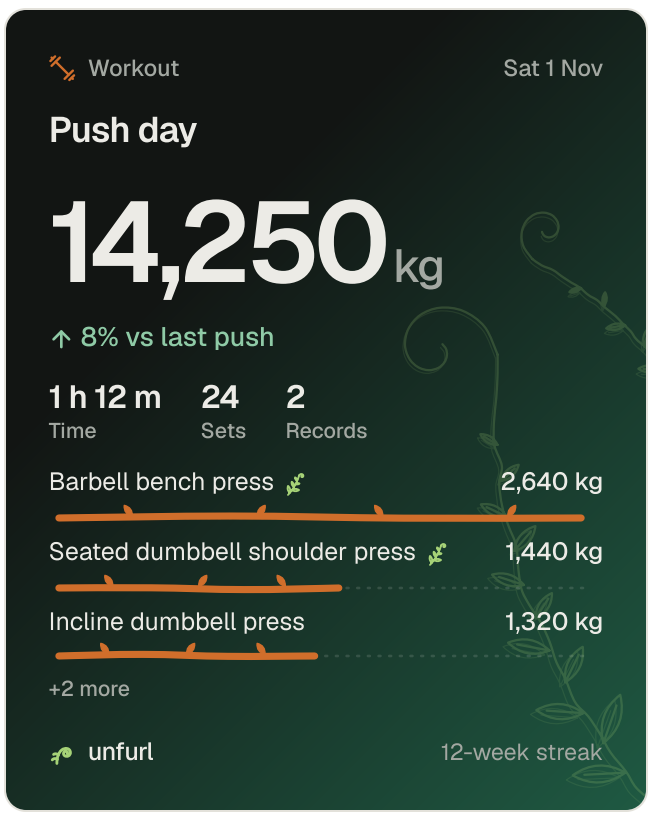

Post 4:5 · 1,080 × 1,350 px

1. **Header:** area icon in its data colour, kicker and date in `caption`. No accent bar. Guiding.
2. **Title:** what was done, in `title`. Wraps to three lines before anything else shrinks.
3. **Hero:** the one number in `num-display` (Geist 600), unit muted, the change beside it in the good colour. No chip.
4. **Figures:** up to three, standing on the ground over their labels. No tiles.
5. **Chart:** where the volume went. One row per exercise: the stem's length is its volume, each leaf on it is one set, a sprig marks a record.
6. **Background:** a hand-drawn frond in `share-line` at 20%, kept to the right edge.
7. **Footer:** flat lockup at left, one quiet fact at right.

Training


Workout summary


Workout detail → Share (fitness/share/[id])

What changes from today


- Three equal boxed stat tiles; nothing is the hero
- Volume flips from kg to "t" above 10 t
- Exercises listed as text only; where the volume went is not shown
- Lockup bottom-right fights the foot text for the same line

▼ Today's card in the app

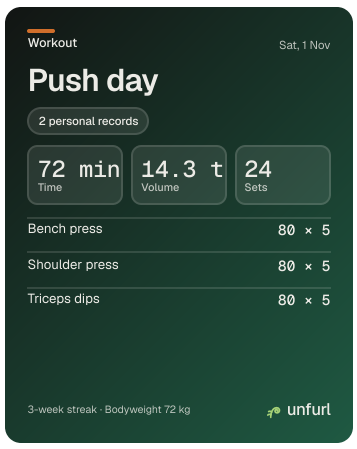

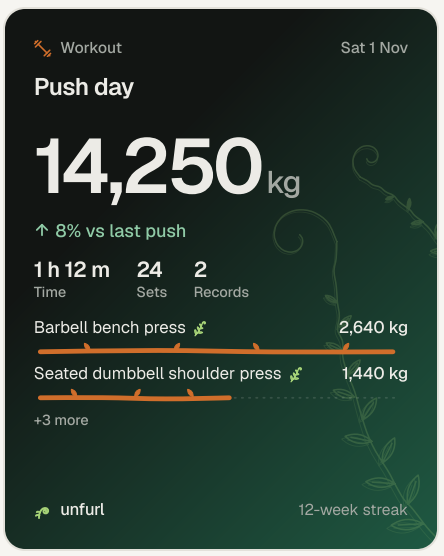


Post 4:5 · Fern ground

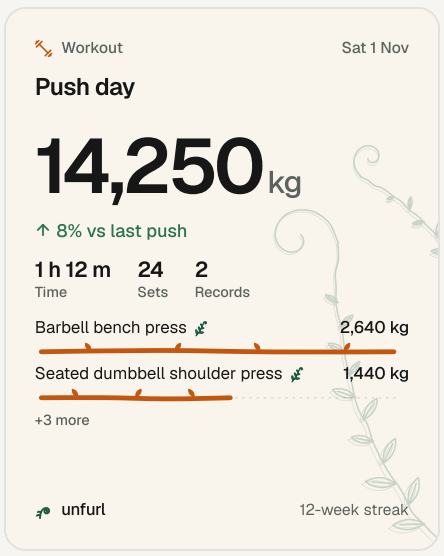

Post 4:5 · Paper ground



Square 1:1 · Fern ground

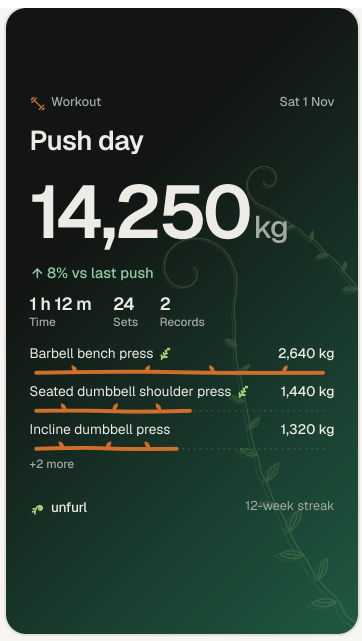

Story 9:16 · Fern ground

`num-display` `title` `caption` `detail` `micro` `fit` `good` `share-mark` `share-line`

Personal record


Exercise detail, workout PR chip, Trophy case (pr)

What changes from today


- The kicker says "Workout", not that this is a record
- Delta "+5 kg vs previous best" sits under the chart, away from the number
- The trend has no previous-best line, so the jump is not visible

▼ Today's card in the app



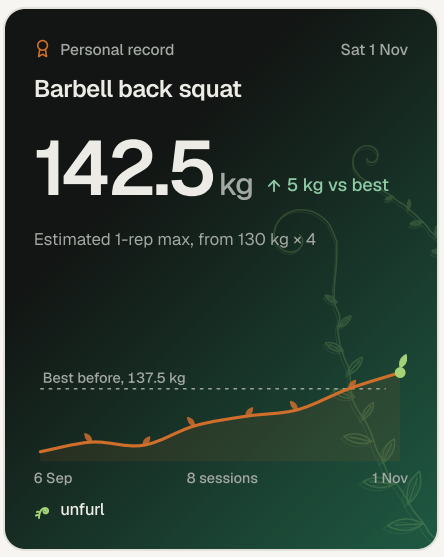


Post 4:5 · Fern ground

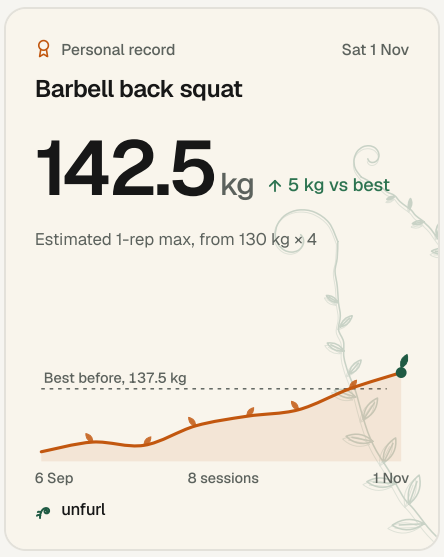

Post 4:5 · Paper ground



Square 1:1 · Fern ground

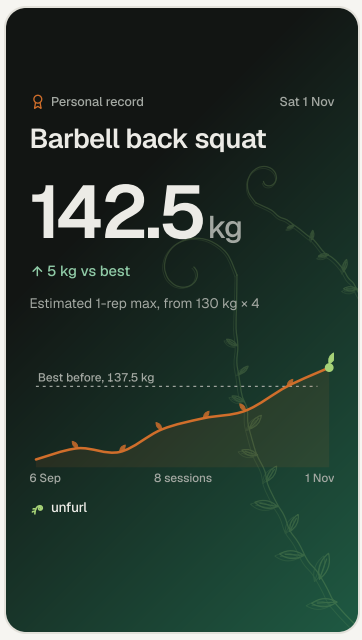

Story 9:16 · Fern ground

`num-display` `num-poster` `title` `caption` `micro` `fit` `good` `share-mark`

Run New card


Proposed: run summary → Share (runs are tracked today; no card exists)

Today: no card


- No share card today; runs can only be shared as text




Post 4:5 · Fern ground

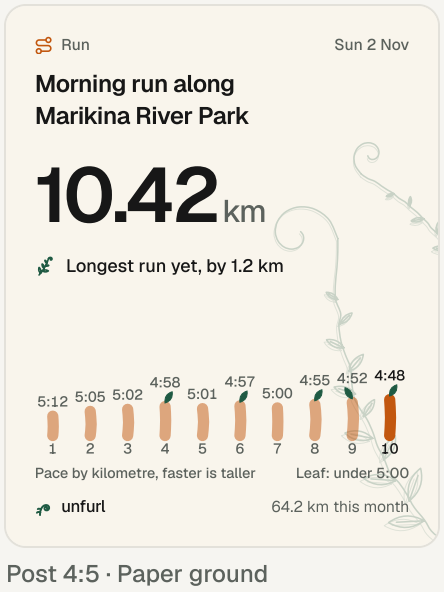

Post 4:5 · Paper ground

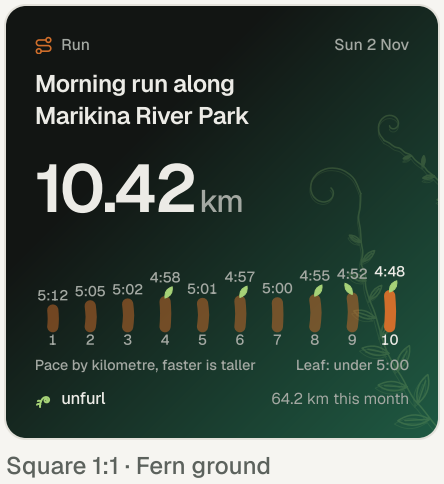

Square 1:1 · Fern ground

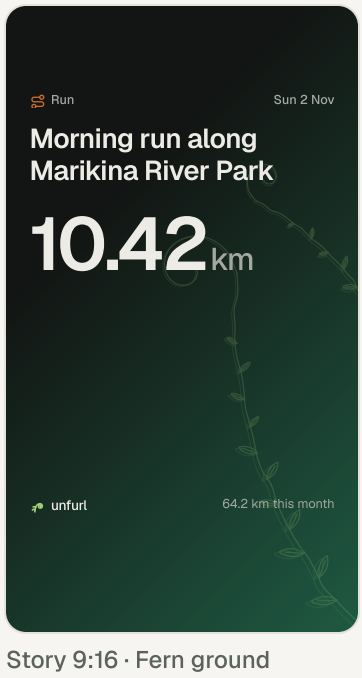

Story 9:16 · Fern ground

`num-display` `title` `caption` `micro` `fit` `good` `share-mark`


Workout on your photo


Workout share → Photo ground

What changes from today


- Stat tiles sit on a translucent panel that hides the photo
- Placeholder copy "Add your gym photo" can be exported

▼ Today's card in the app

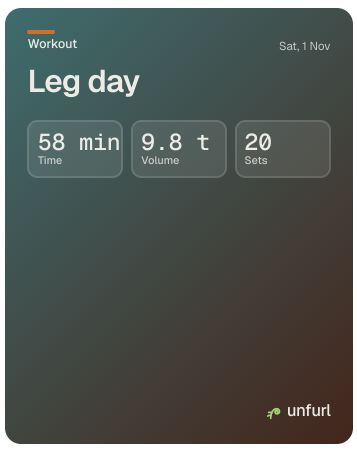


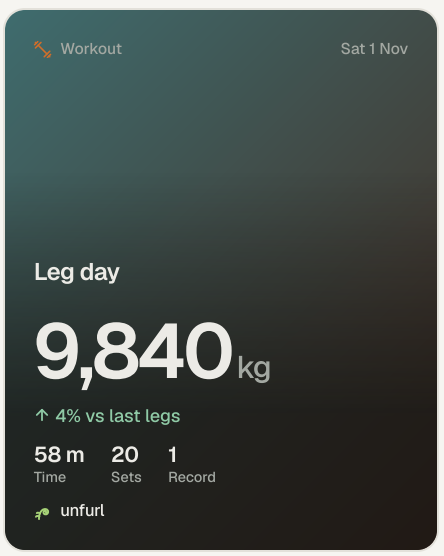


Post 4:5 · Your photo

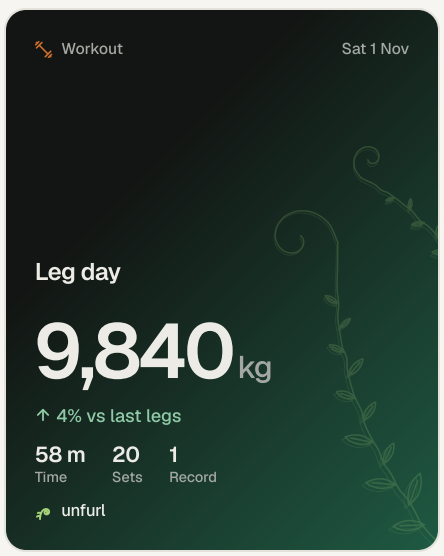

Post 4:5 · Fern ground

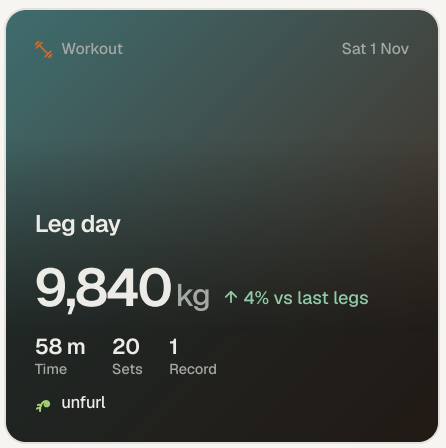

Square 1:1 · Your photo

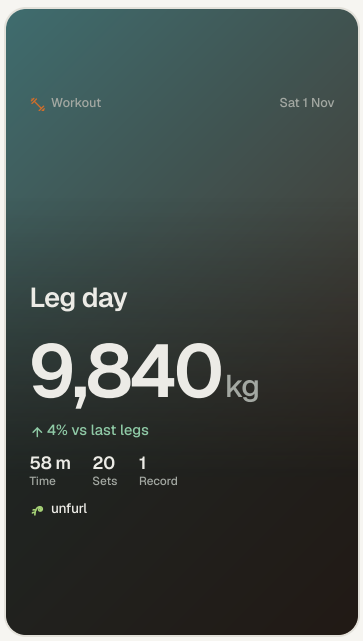

Story 9:16 · Your photo

`num-display` `title` `caption` `micro` `share-photo-scrim` `share-mark`

Habits and routines


Routine run


Routine finished → Share (habits/share?t=routine)

What changes from today


- Kicker says "Habits" on a routine
- No date in the header; the date hides inside a chip
- Time has no comparison, so a fast run is not celebrated

▼ Today's card in the app

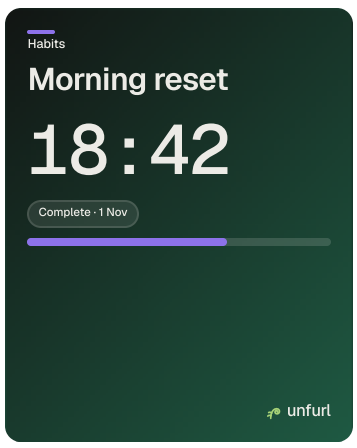


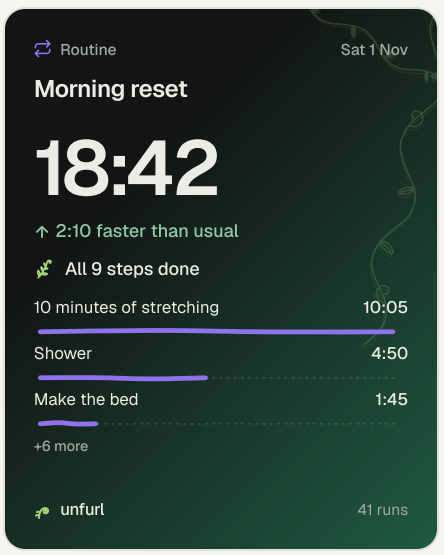


Post 4:5 · Fern ground

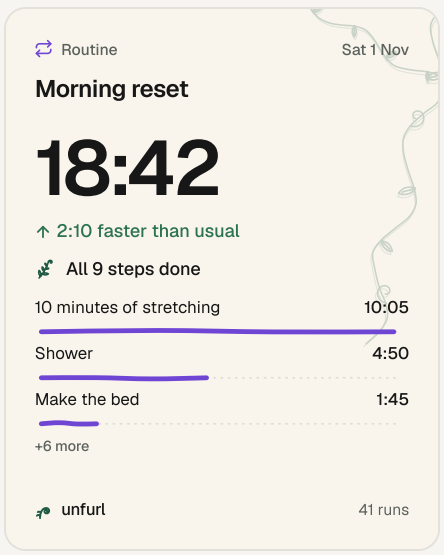

Post 4:5 · Paper ground

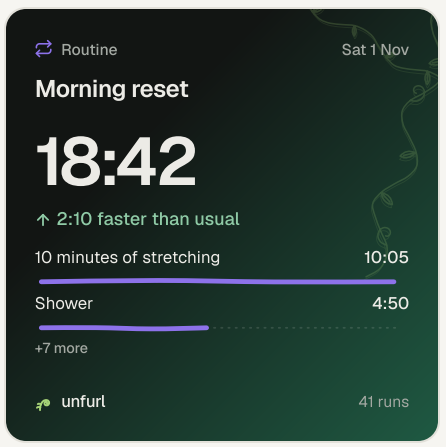

Square 1:1 · Fern ground

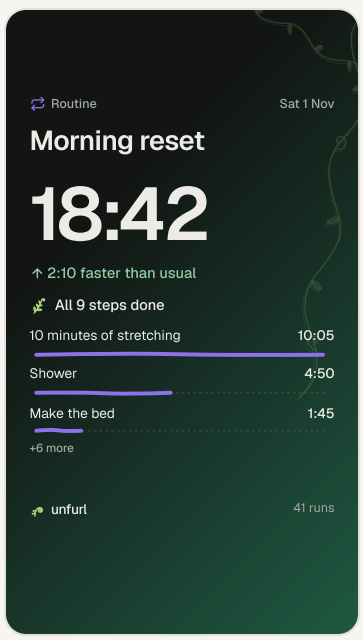

Story 9:16 · Fern ground

`num-display` `title` `caption` `detail` `hab` `good`


Streak (one card for habits, tasks, journal and on-target days)

Habit detail, Tasks stats, Journal, Stats → Streak, Trophy case (streak)

What changes from today

- Four streak cards with four sets of sizes (ring 56–58q, number 13–18q, headline 5–6q)
- The ring is full for every streak, so it carries no information
- "Personal best" vs "Longest streak yet" for the same event

▼ Today's card in the app







Post 4:5 · Fern ground




Post 4:5 · Paper ground

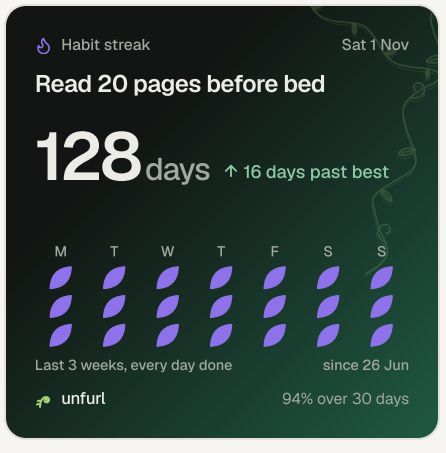

Square 1:1 · Fern ground

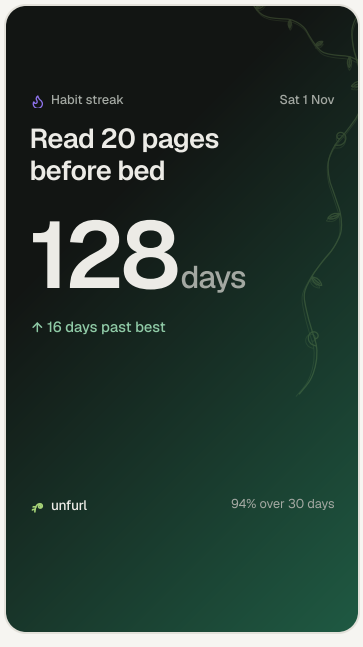

Story 9:16 · Fern ground



`num-display` `num-poster` `title` `caption` `micro` `hab | tsk | life` `share-mark`


Habit milestone


Habit detail → Share → Milestone

What changes from today


- Current and best streak in boxed tiles repeat the hero
- Next milestone meter has no mark for where it ends

▼ Today's card in the app

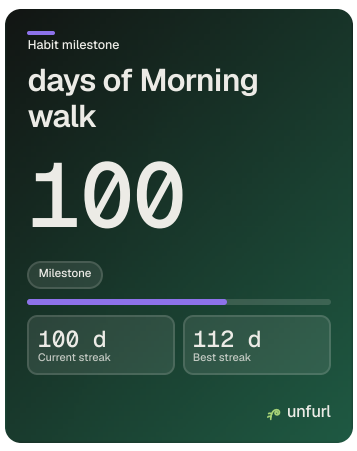


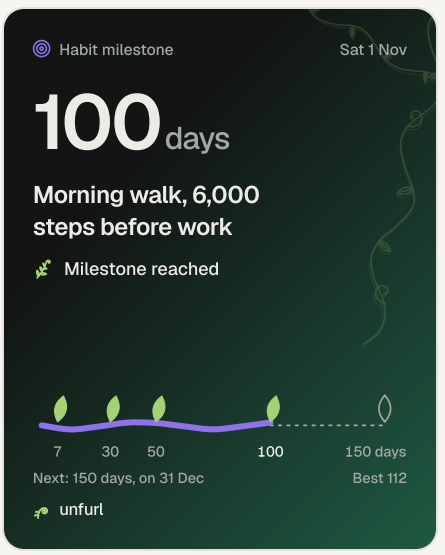


Post 4:5 · Fern ground

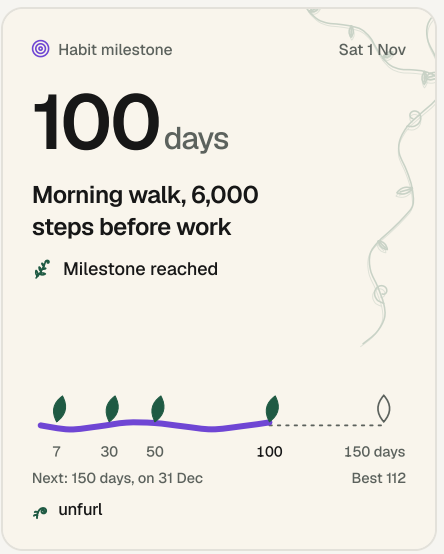

Post 4:5 · Paper ground

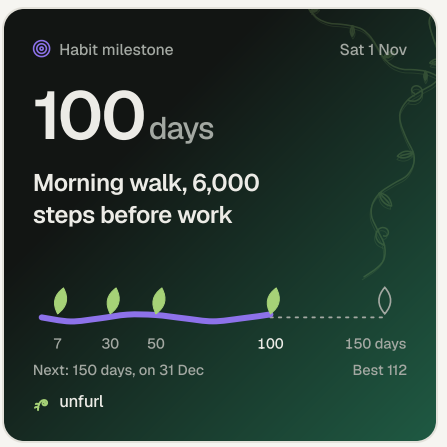

Square 1:1 · Fern ground

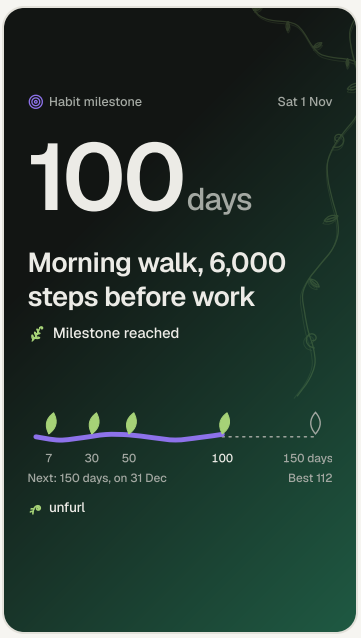

Story 9:16 · Fern ground

`num-poster` `num-display` `title` `caption` `micro` `hab`


Habit month


Habit detail → Share → Month

What changes from today


- Missed days look the same as days before the habit existed
- Verdict "Locked in" is hype the brand voice rules out
- Grid width is tuned per card (100%, 62%, 44%)

▼ Today's card in the app

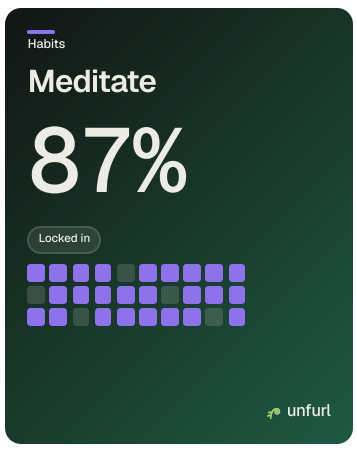

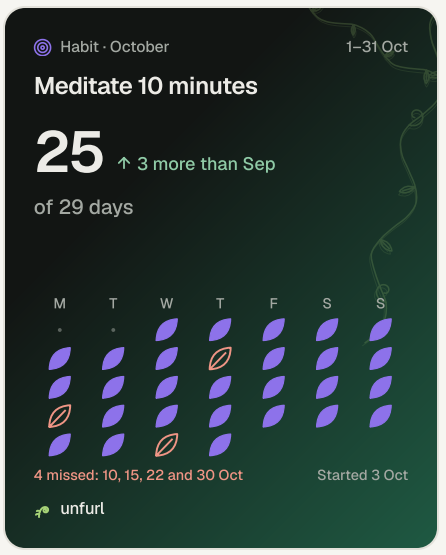


Post 4:5 · Fern ground

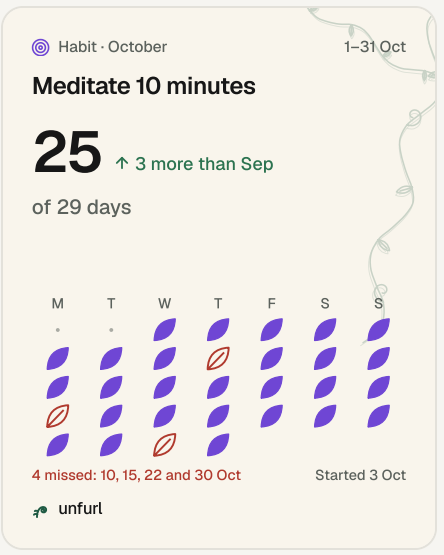

Post 4:5 · Paper ground



Square 1:1 · Fern ground

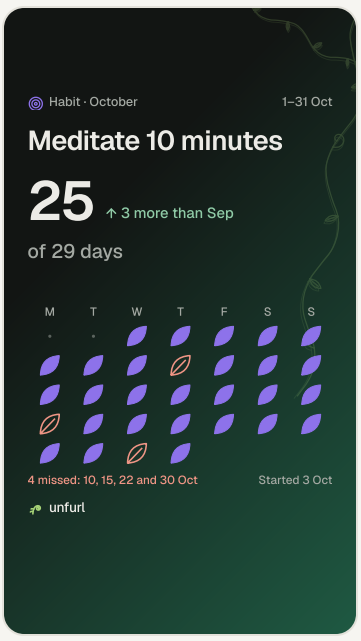

Story 9:16 · Fern ground

`num-display` `title` `caption` `micro` `hab` `bad`


Habit scoreboard


Habits home → Share

What changes from today


- Streak rows put the bar between name and number; numbers in an 18q column wrap at 3 digits

▼ Today's card in the app

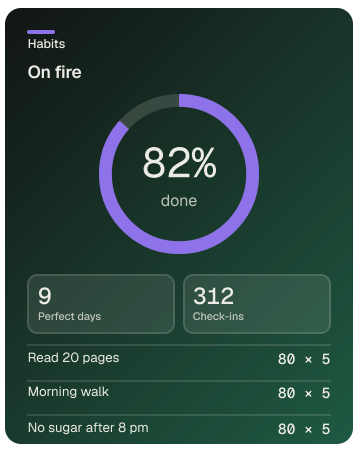


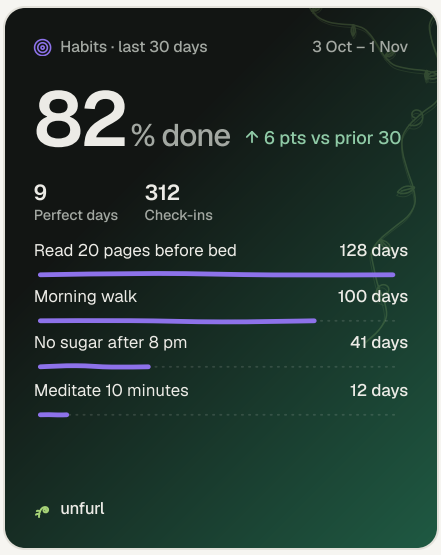


Post 4:5 · Fern ground

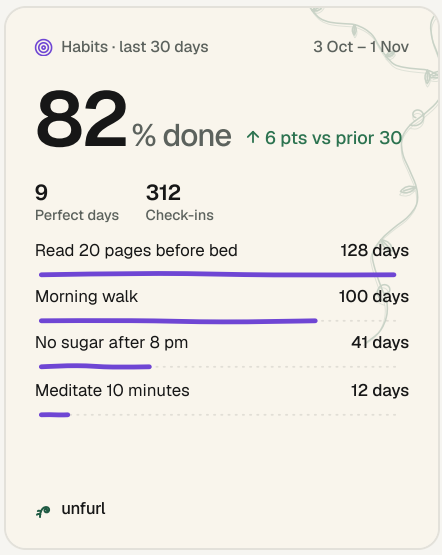

Post 4:5 · Paper ground

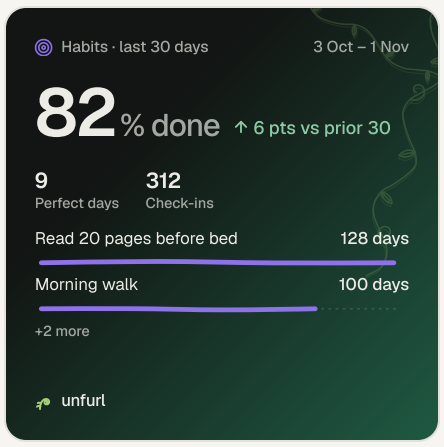

Square 1:1 · Fern ground

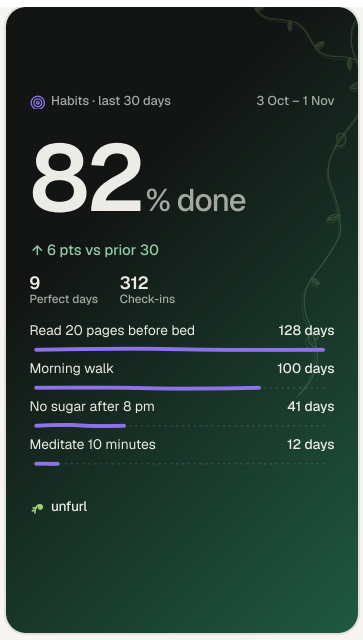

Story 9:16 · Fern ground

`num-display` `title` `caption` `detail` `hab` `good`

Wins

Trophy New card

Proposed: Trophy case → trophy → Share (today it borrows the streak, goal or profile card)

Today: no card

- No trophy card: a PR trophy opens the PR card, a streak trophy the streak card, the rest the profile card



Post 4:5 · Fern ground



Post 4:5 · Paper ground



Square 1:1 · Fern ground



Story 9:16 · Fern ground

`num-display` `title` `caption` `life` `share-mark` `badge set`

Day sealed New card


Proposed: the "Sealed on target" moment → Share

Today: no card

- The "Sealed on target" moment exists but cannot be shared




Post 4:5 · Fern ground

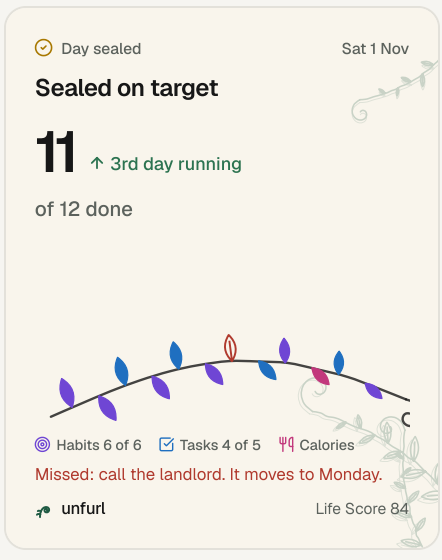

Post 4:5 · Paper ground



Square 1:1 · Fern ground

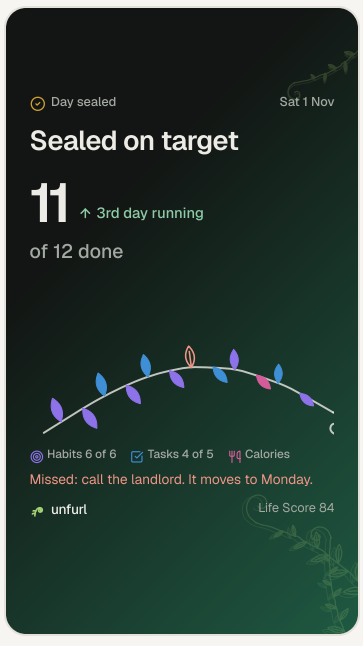

Story 9:16 · Fern ground

`num-display` `title` `caption` `micro` `hab · tsk · nut` `good` `bad`

Recaps


Week recap


Stats → Weekly review → Share

What changes from today


- Weekday initials hard-coded "SMTWTFS" (Sunday first) while Tasks uses the locale
- Three boxed stat tiles, deltas abbreviated "vs last wk"
- Missed days are drawn but their cost is not said

▼ Today's card in the app

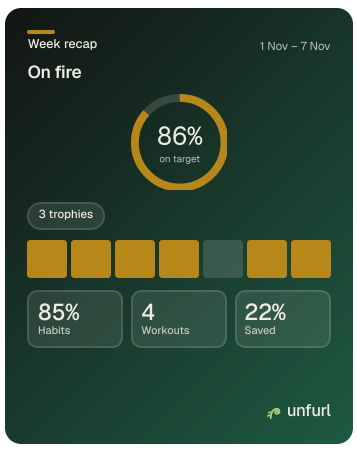


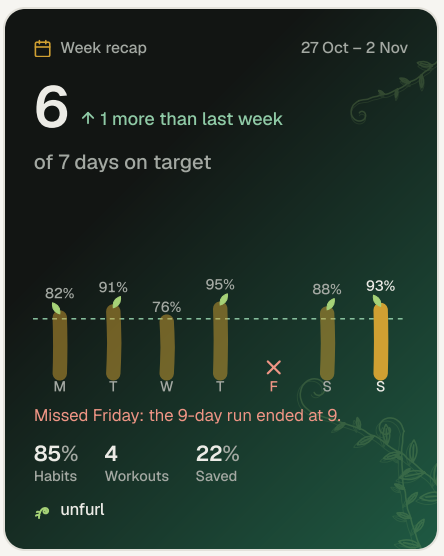


Post 4:5 · Fern ground

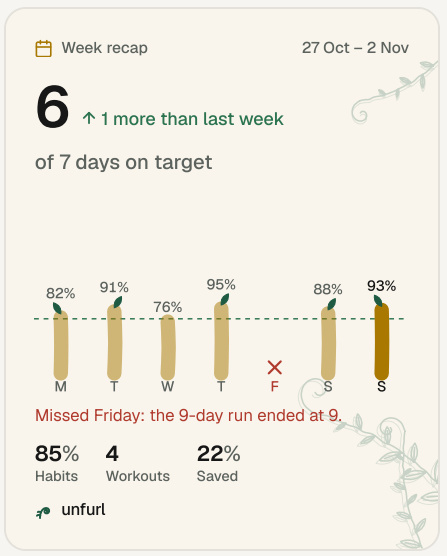

Post 4:5 · Paper ground

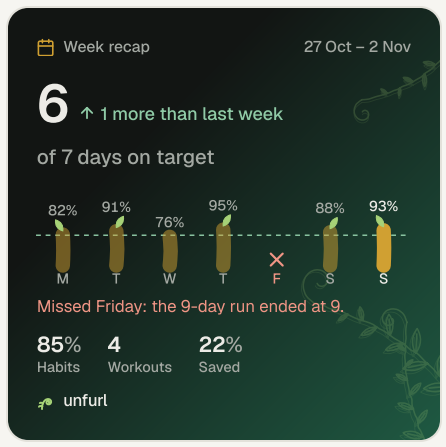

Square 1:1 · Fern ground

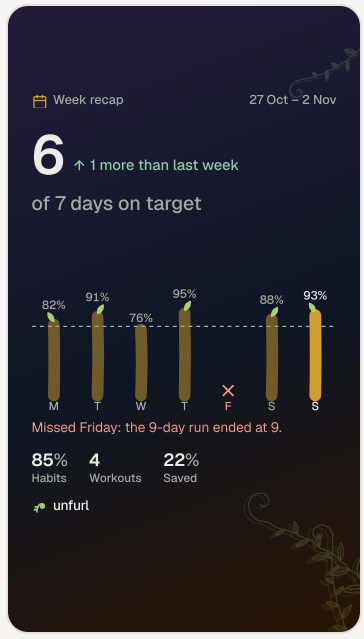

Story 9:16 · Dusk ground

`num-display` `title` `caption` `micro` `life` `good` `bad`


Month recap

Stats → Monthly review → Share

What changes from today


- Title says "November" while the date says "Last 30 days"
- 4 boxed stats at 6.5q on square cards
- Three chips in a row wrap unpredictably

▼ Today's card in the app

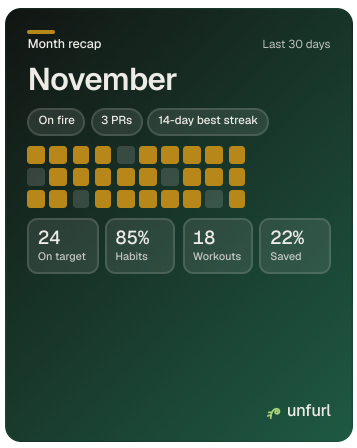



Post 4:5 · Fern ground

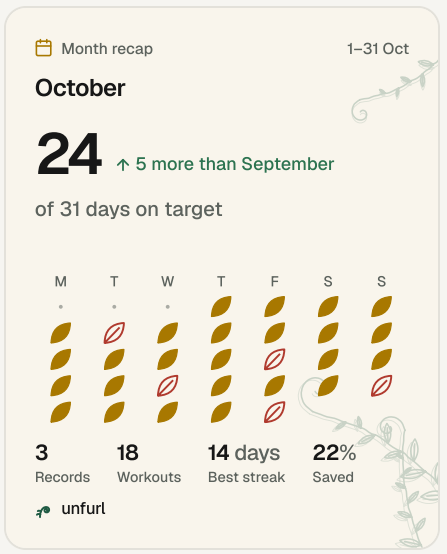

Post 4:5 · Paper ground



Square 1:1 · Fern ground



Story 9:16 · Dusk ground

`num-display` `title` `caption` `micro` `life` `good` `bad`


Life Score


Stats → Life Score → Share

What changes from today


- The hexagon needs a two-series legend and its labels are 2.5q (≈9 pt), below the minimum
- A score ring and a hexagon say the same thing twice

▼ Today's card in the app

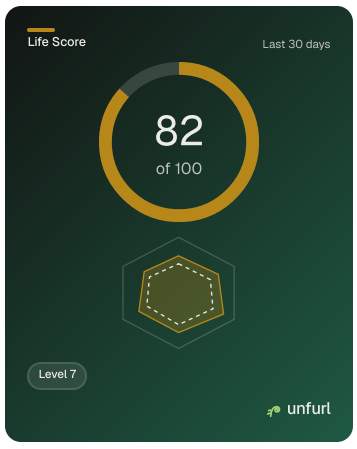


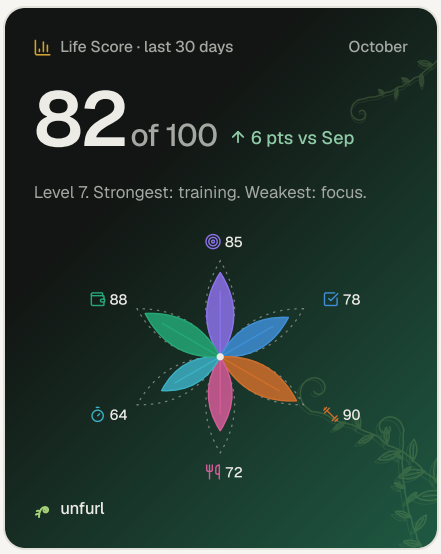


Post 4:5 · Fern ground

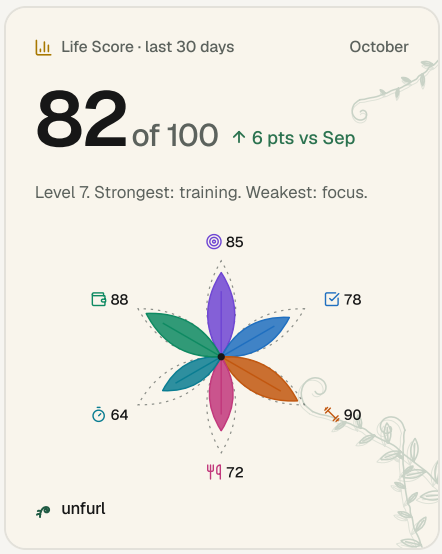

Post 4:5 · Paper ground

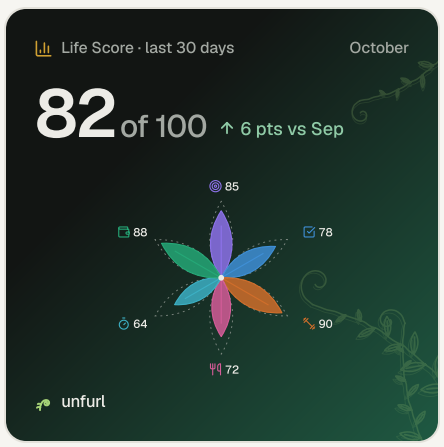

Square 1:1 · Fern ground

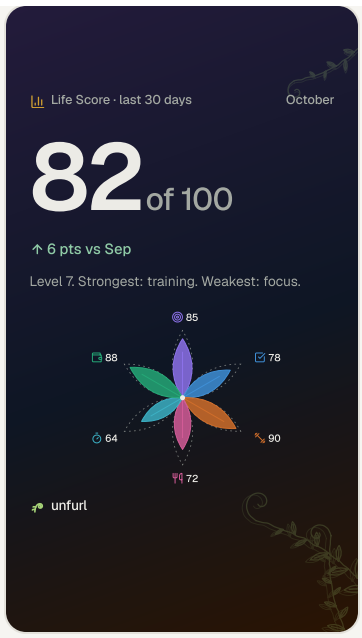

Story 9:16 · Dusk ground

`num-display` `caption` `micro` `hab · tsk · fit · nut · foc · fin` `good`


Goal


Stats → Goals, Trophy case (goal)

What changes from today


- Ring at 100% and the hero number both say "done"; the target is a small label

▼ Today's card in the app

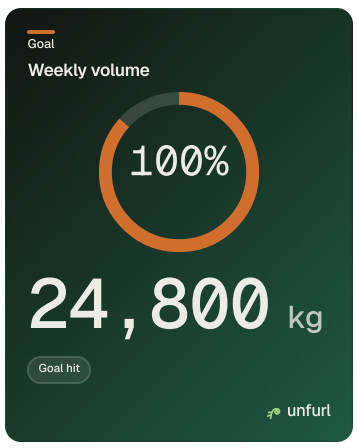


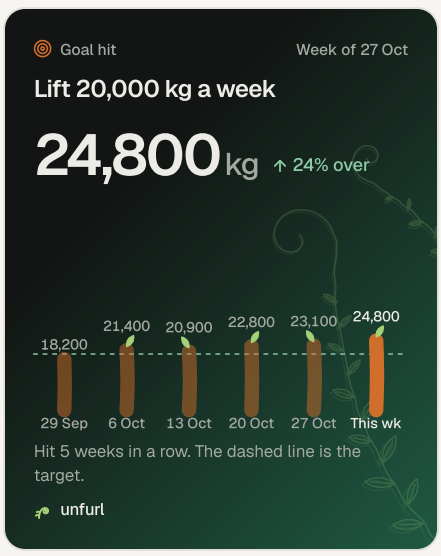


Post 4:5 · Fern ground

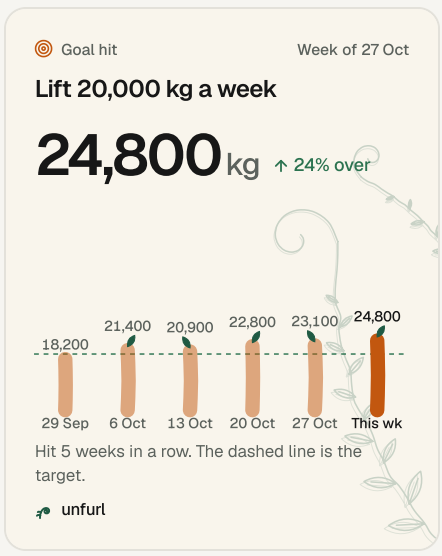

Post 4:5 · Paper ground

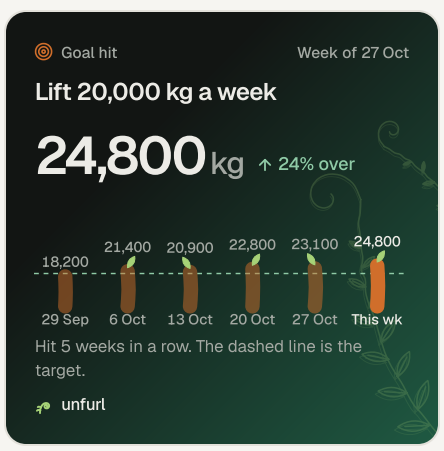

Square 1:1 · Fern ground

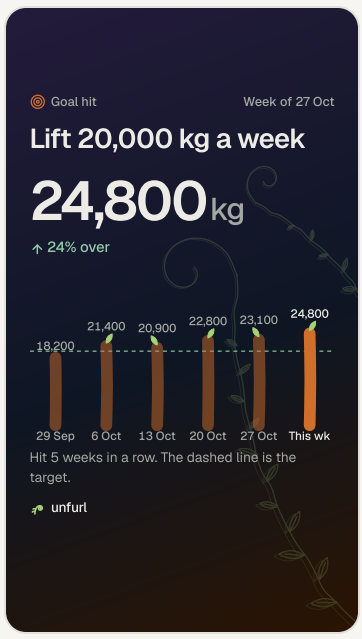

Story 9:16 · Dusk ground

`num-display` `title` `caption` `micro` `fit` `good`


Profile


Me → Share profile (9:16 only today)

What changes from today


- Story only; no post or square version
- Hexagon again needs a legend

▼ Today's card in the app

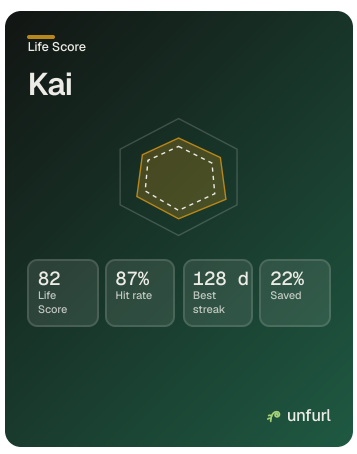


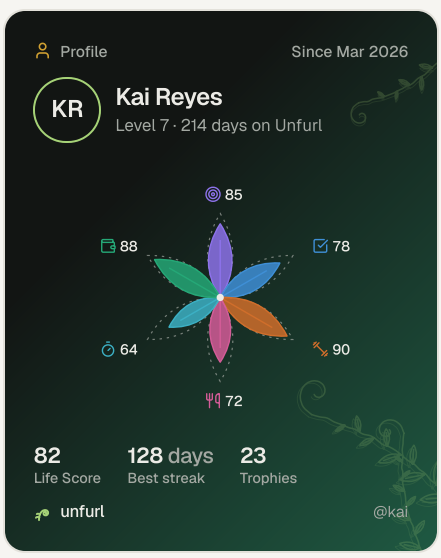

Post 4:5 · Fern ground

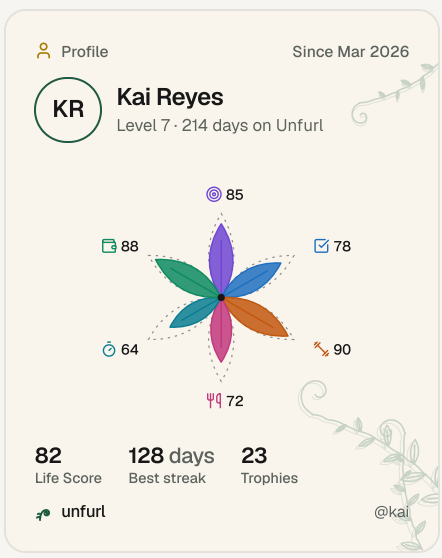

Post 4:5 · Paper ground

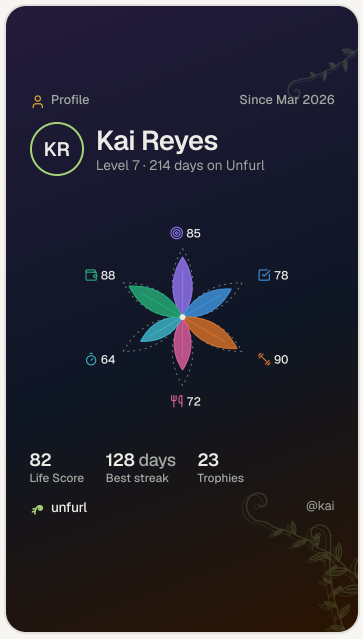

Story 9:16 · Dusk ground

`title` `page-title` `caption` `micro` `life` `share-mark`

Money


Money, in percent

Stats → Money → Share; finance review "Share card"

What changes from today


- The finance review sheet draws its own fin→tsk gradient with hard-coded white, outside the system
- Privacy line printed on the artwork, where only the sharer needs it

▼ Today's card in the app

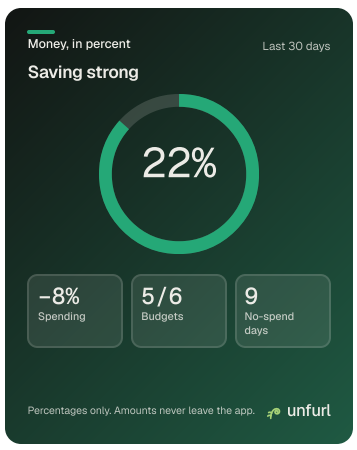



Post 4:5 · Fern ground

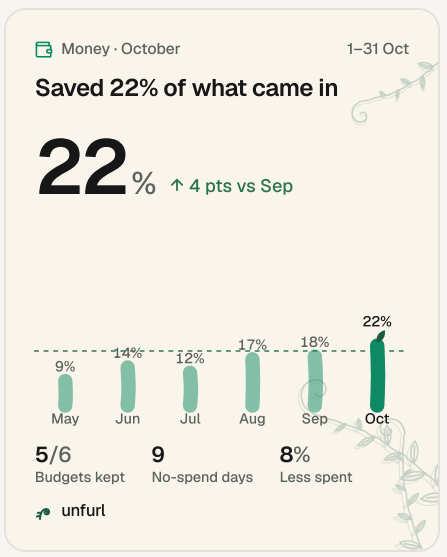

Post 4:5 · Paper ground



Square 1:1 · Fern ground




Story 9:16 · Fern ground

Savings goal reached New card

Proposed: the savings-goal moment → Share (moment exists, no card)

Today: no card

- The savings-goal moment celebrates in the app but cannot be shared

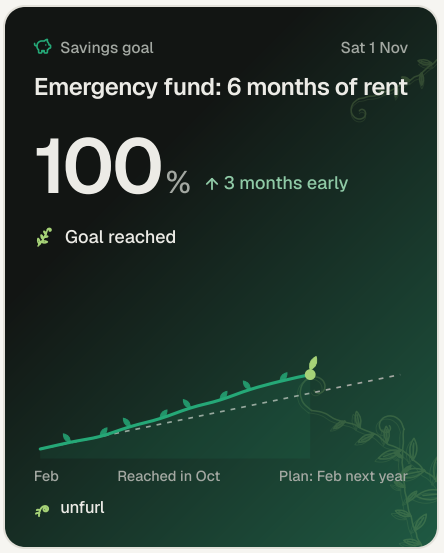


Post 4:5 · Fern ground



Post 4:5 · Paper ground



Square 1:1 · Fern ground

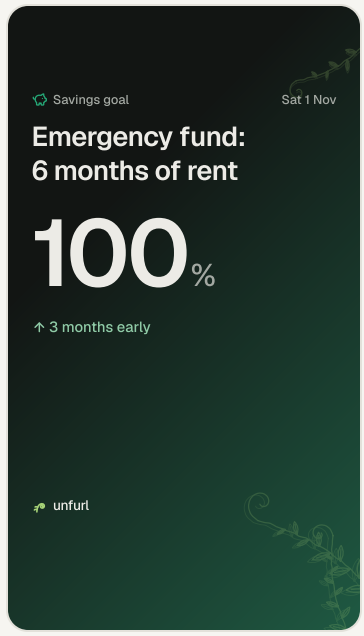

Story 9:16 · Fern ground

Food


Food day


Nutrition → Share → Day

What changes from today


- No foot or lockup position shared with other cards
- Macro values as "87% of goal" text plus a bar that says the same

▼ Today's card in the app

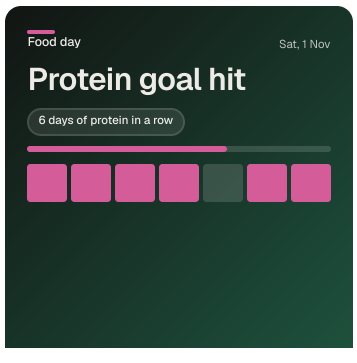

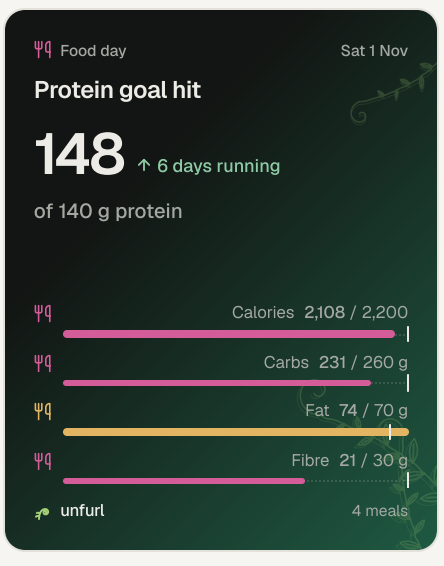


Post 4:5 · Fern ground

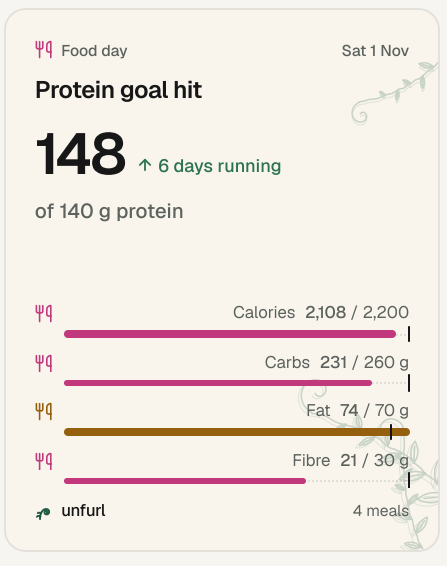

Post 4:5 · Paper ground



Square 1:1 · Fern ground

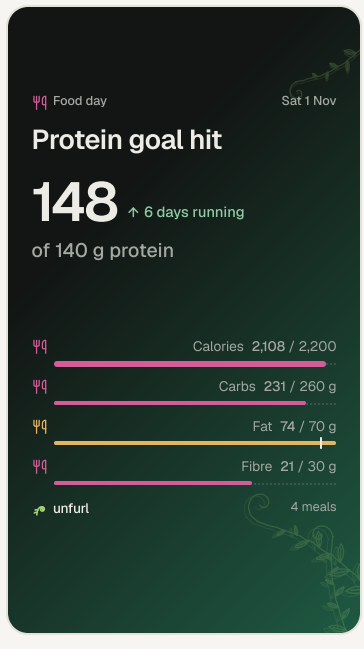

Story 9:16 · Fern ground



num-display title caption detail nut good warn


Food week


Nutrition → Share → Week

What changes from today


- Footnote "Rates over the N logged days" at 3.4q is the only place the denominator appears

▼ Today's card in the app

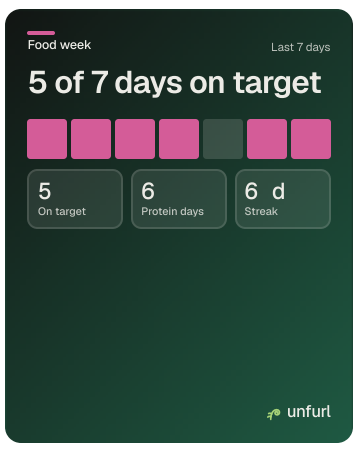

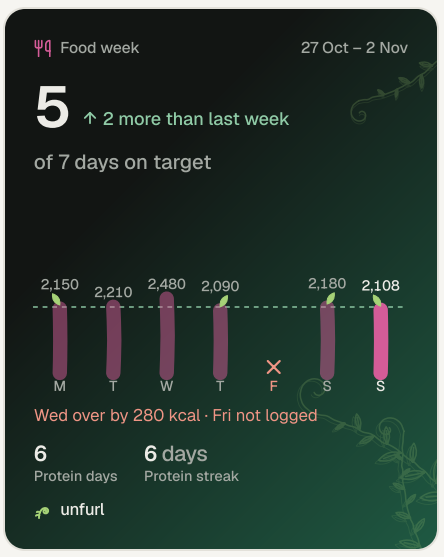


Post 4:5 · Fern ground

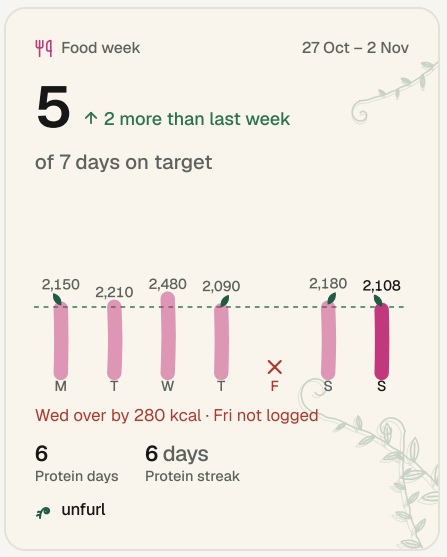

Post 4:5 · Paper ground



Square 1:1 · Fern ground

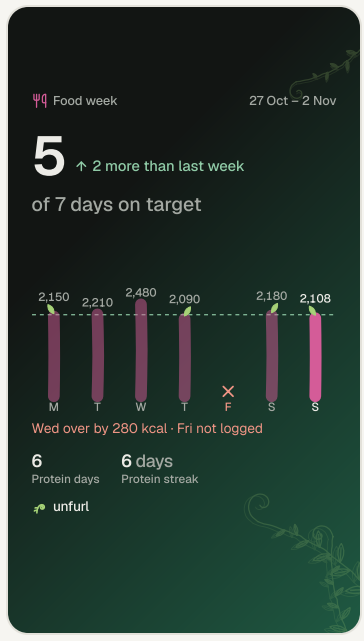

Story 9:16 · Fern ground

Tasks, journal, focus


Tasks


Tasks stats → Share (week, month or 90 days)

What changes from today


- Dates month-first ("Nov 1 – Nov 7") unlike every other card
- Verdicts and thresholds differ from Habits ("Solid work" at 0.65 vs "Locked in" at 0.6)
- Chips hidden on square with display:none

▼ Today's card in the app

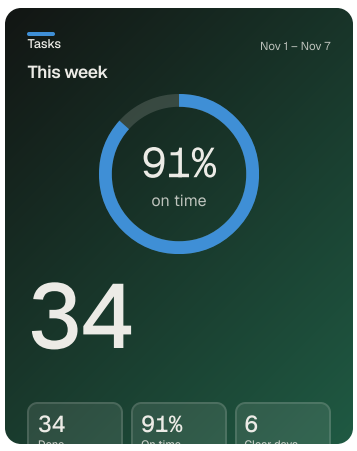

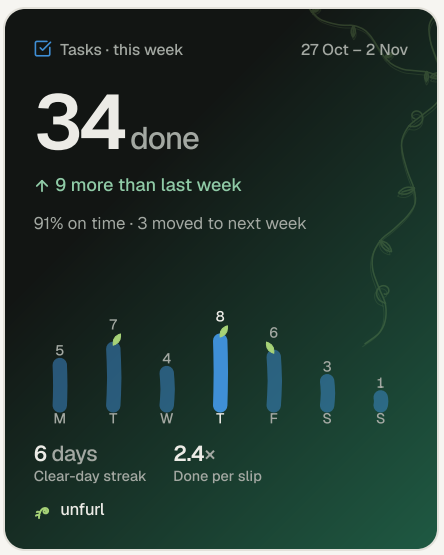

Post 4:5 · Fern ground

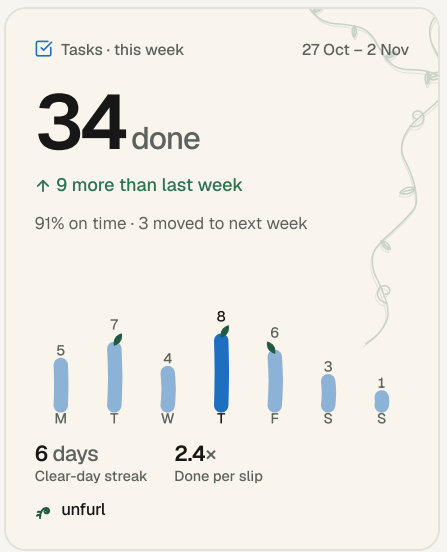

Post 4:5 · Paper ground



Square 1:1 · Fern ground



Story 9:16 · Fern ground

num-display title caption micro tsk good


Journal

Journal → Share (streak or month)

What changes from today

- Shares the Life Score colour because journal has no area colour
- Privacy line on the artwork

▼ Today's card in the app

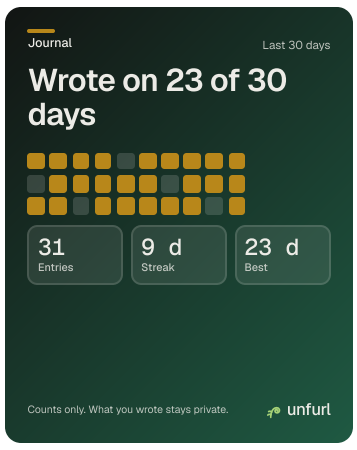



Post 4:5 · Fern ground



Post 4:5 · Paper ground



Square 1:1 · Fern ground



Story 9:16 · Fern ground

`num-display` `title` `caption` `micro` `life`

Focus New card


Proposed: Focus → week → Share (the focus-goal moment exists; no card)

Today: no card

- No focus card today




Post 4:5 · Fern ground

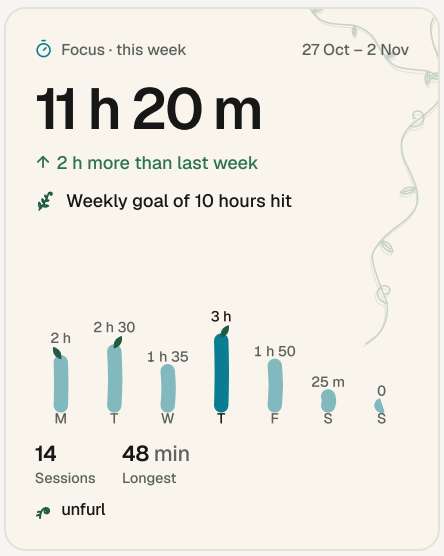

Post 4:5 · Paper ground



Square 1:1 · Fern ground

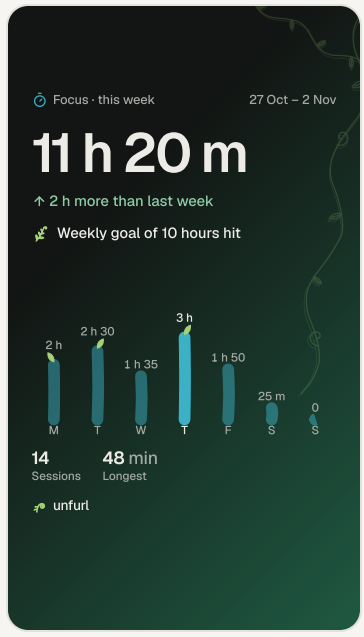

Story 9:16 · Fern ground

`num-display` `title` `caption` `micro` `foc` `good`

Trophy and badge set

Eight badges, one frame: a wreath of two hand-drawn fronds tied with a ribbon, and one emblem in the area or win colour, line-drawn with a light tint. Shown on the three grounds and at 64, 96 and 160 px. Trophy types map one to one: pr → New record, streak → Streak, best → Personal best, goal → Goal hit, first → First time.


Personal best


New record


Streak


Goal hit


First time


Day sealed




Milestone


Savings goal




Fern ground

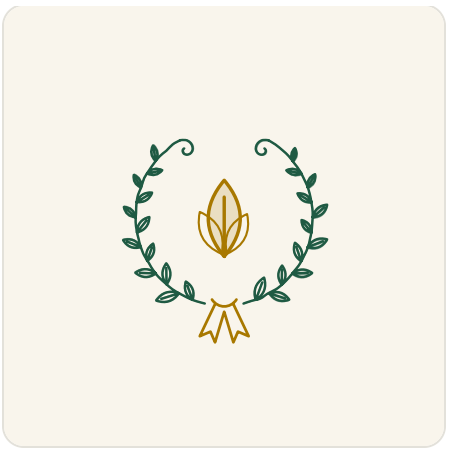

Paper ground




Dusk ground

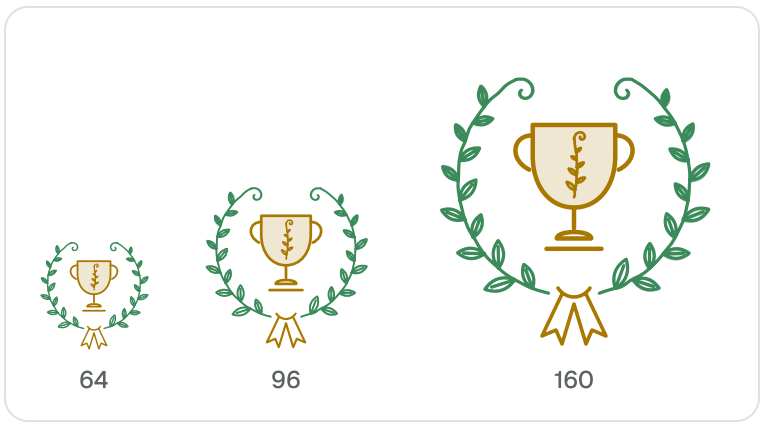


Sizes; the wreath drops its second pass below 64 px

Long data


The anatomy under stress: a 90-character title, exercise names twice the usual length, 7-digit numbers, a long handle. The title wraps and is never cut; the hero steps down to `num-display-s` and its unit drops below it; exercise names wrap above their stems. When there is still not enough room, the fit rule gives way in a fixed order: list rows first (counted into "+N more"), then the list or chart, then the figures, the win line and the sub line.

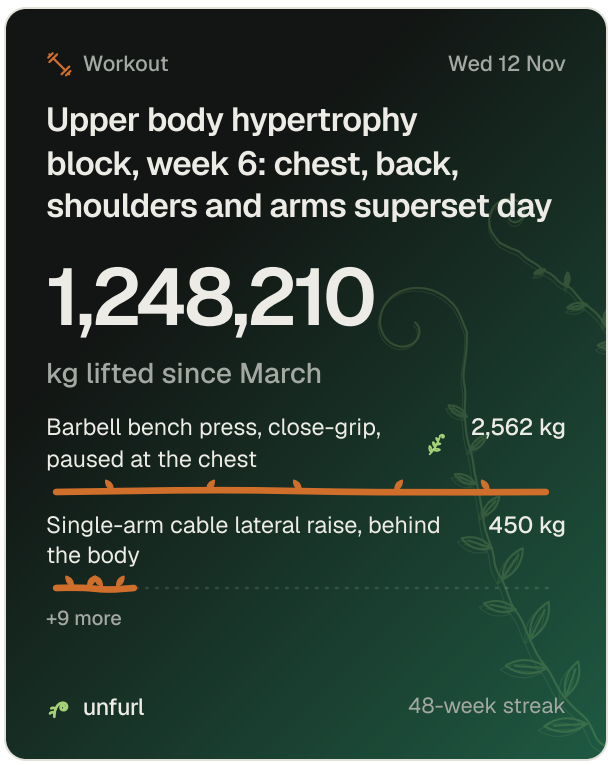


Post 4:5 · Fern

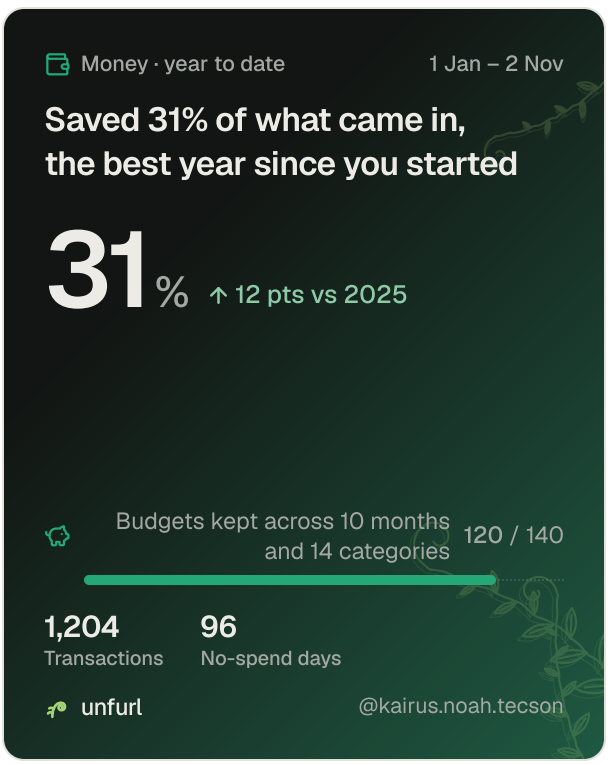


Post 4:5 · Fern

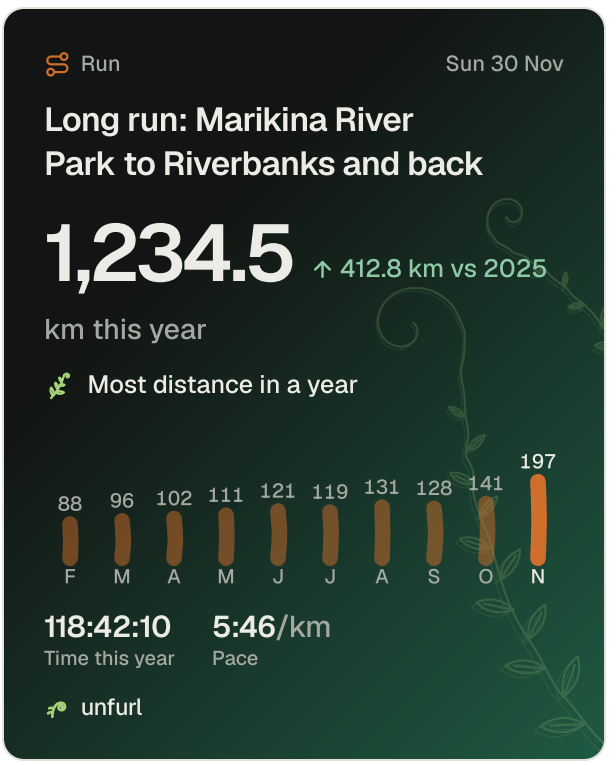

Post 4:5 · Fern

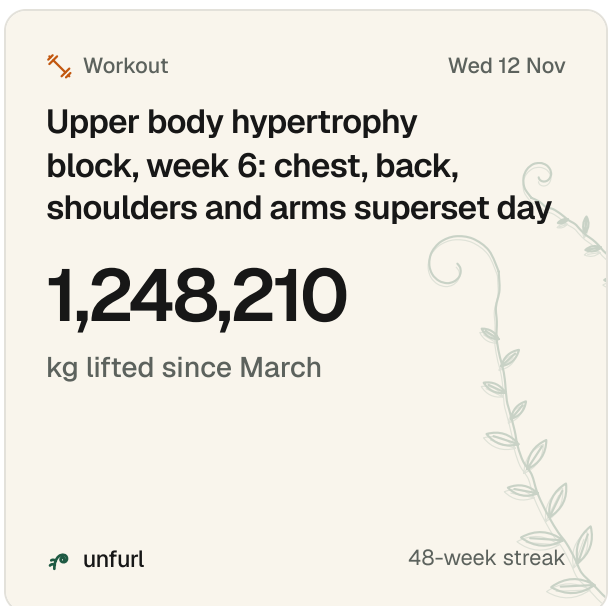

Square 1:1 · Paper, same data

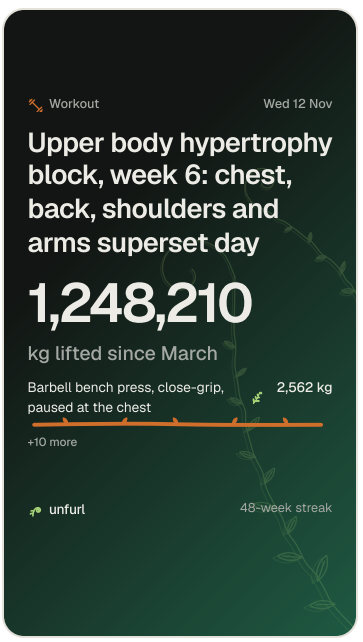


Story 9:16 · Fern


2 · Marketing kit


Copy comes from the positioning document (docs/brand/positioning-and-name.md): the tagline "Say it. It's tracked.", the call to action "Just tell Fern.", and the four pillars. Every feature shown exists in the app today: text, voice and photo logging with Undo, Fern answering from your own records, the Today page, habits, tasks, workouts, runs, food, money, journal, focus, Life Score, streaks, trophies and share cards. The word "AI" does not appear, as the positioning document rules.


App Store screenshots, 6.7 inch (1,290 × 2,796)


In the order the positioning document sets: a sentence becoming records, Fern answering with a chart, the Today page; then breadth and sharing.

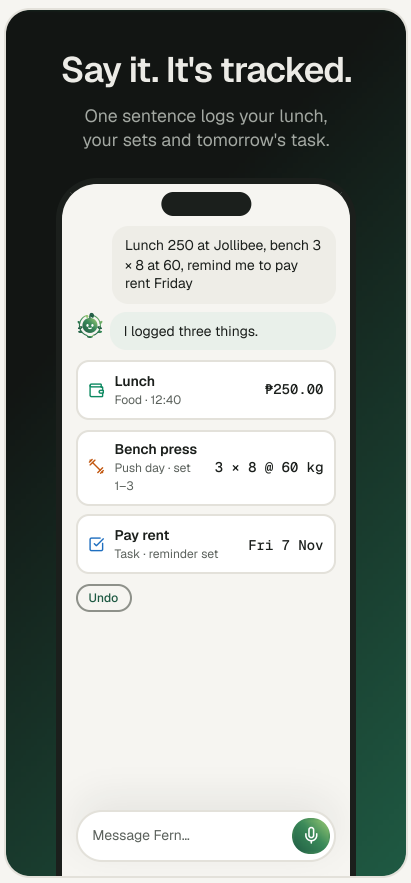

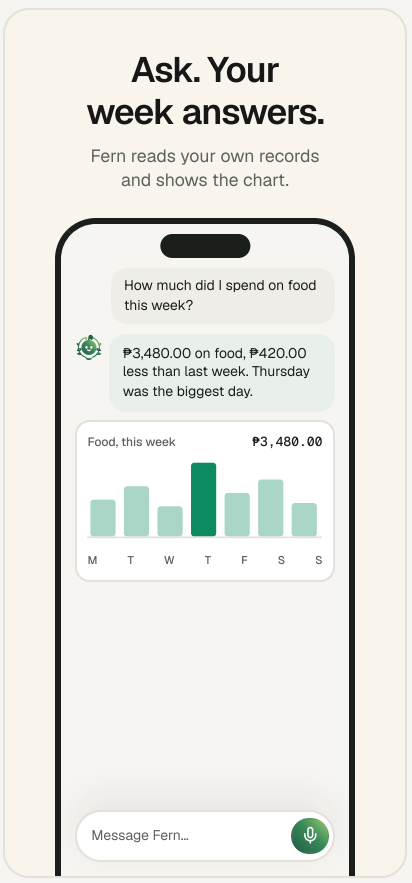

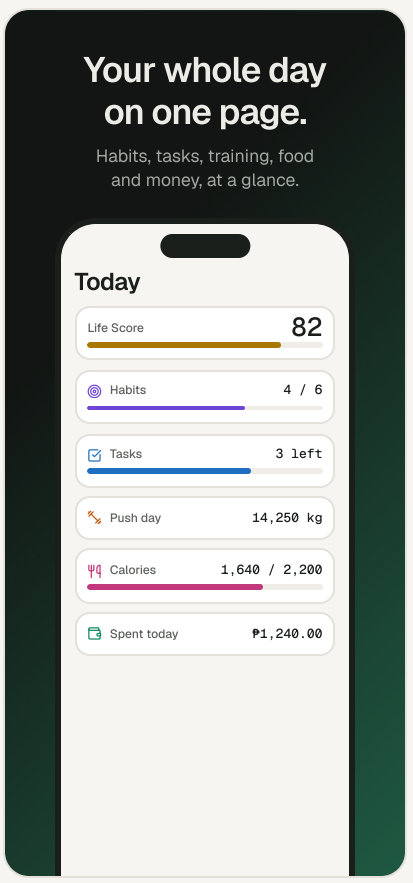


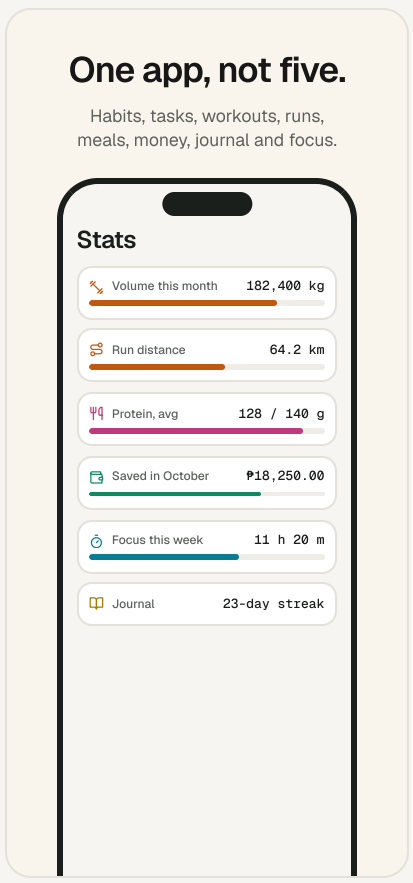


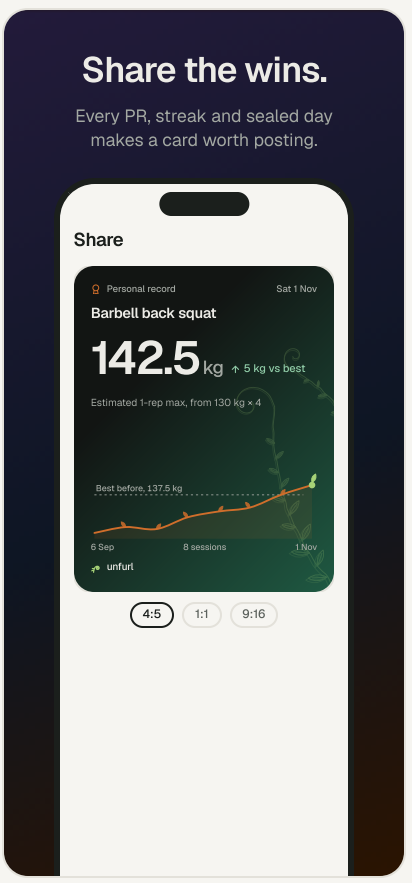


6.1 inch (1,179 × 2,556)

Same aspect ratio as 6.7 inch (0.461), so the same frames export at the smaller size. Headlines are set in points against the frame width, so they keep their line breaks.

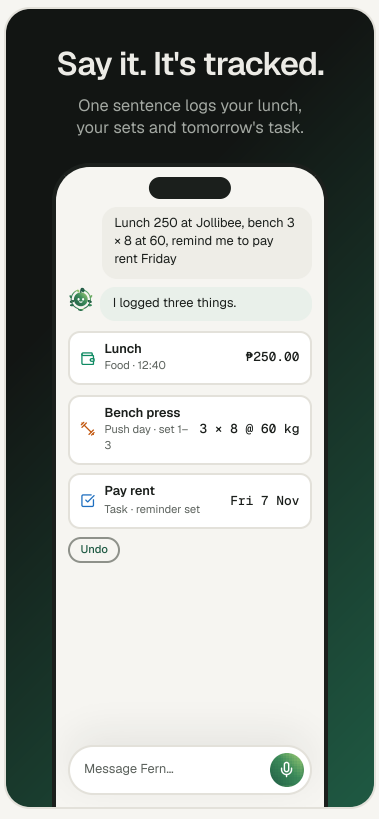


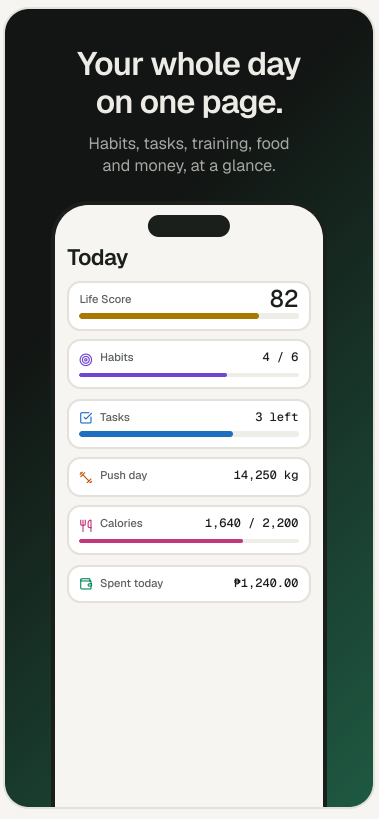


Social posts: feed and story

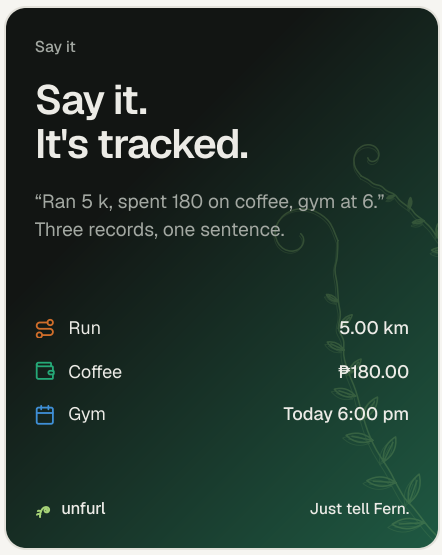


Feed 4:5 · 1080 × 1350

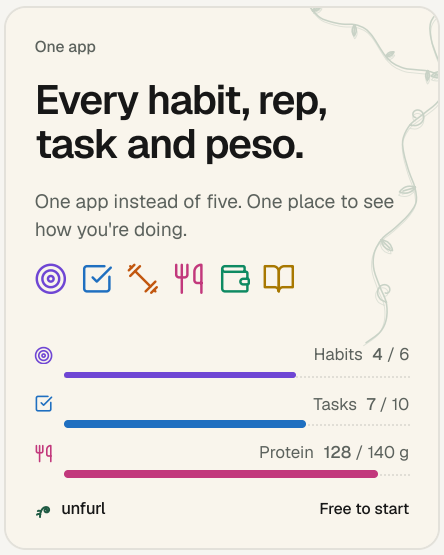


Feed 4:5 · 1080 × 1350

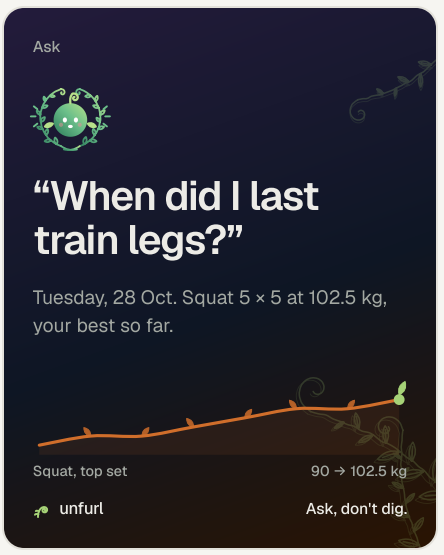

Feed 4:5 · 1080 × 1350

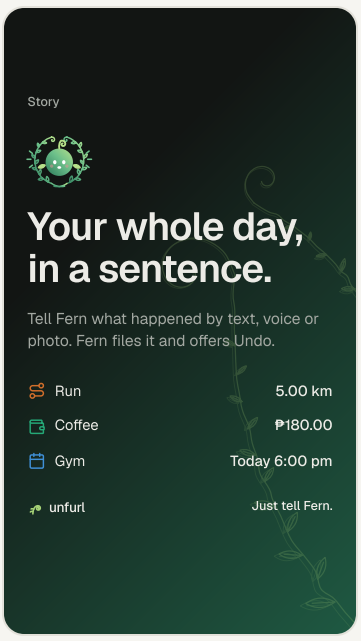


Story 9:16 · 1080 × 1920

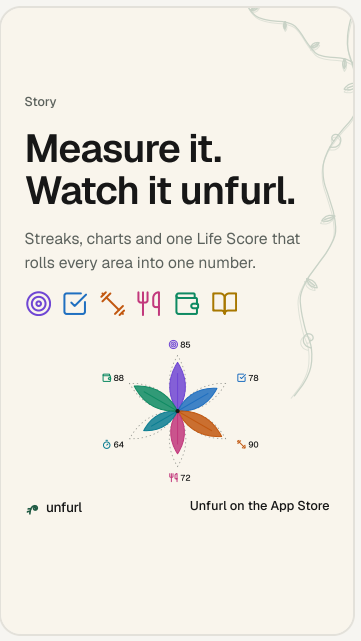


Story 9:16 · 1080 × 1920

Hero banner

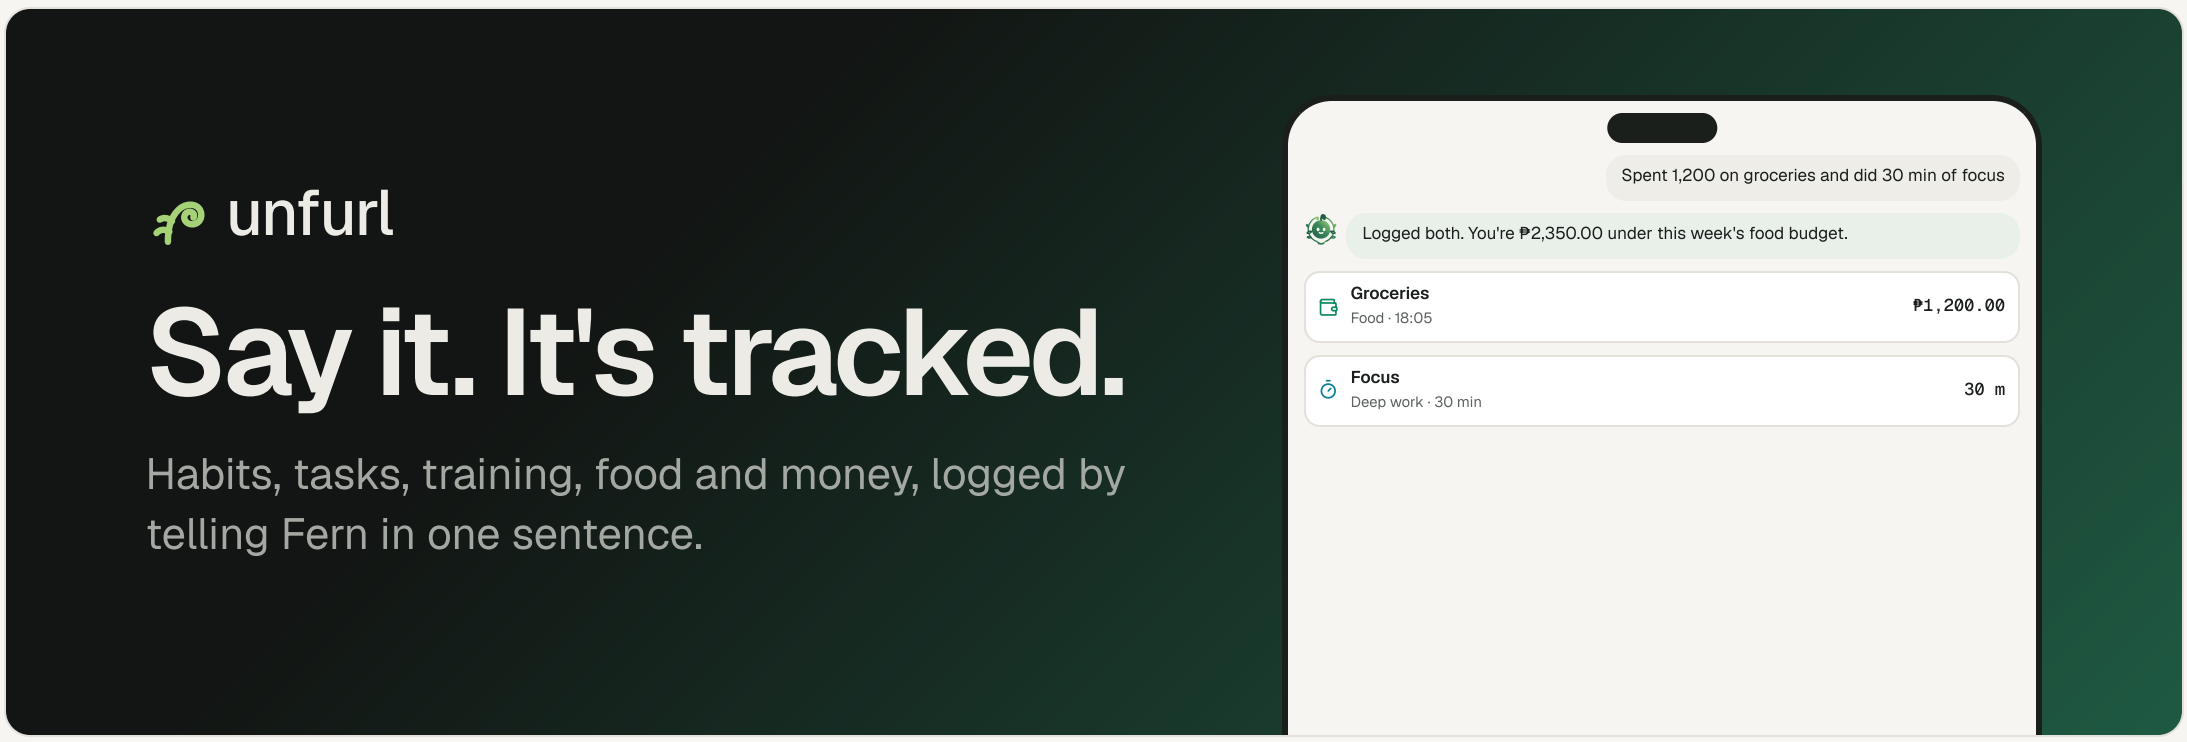


Hero banner 3:1 · 1,500 × 500 px (web header, X, LinkedIn)

App icon in context

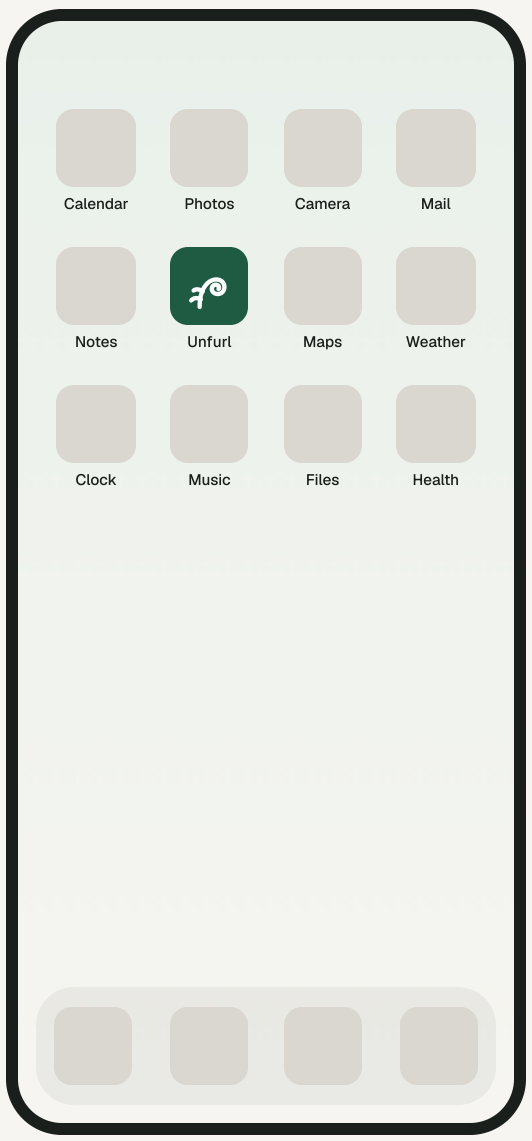

iOS default icon: white mark on moss

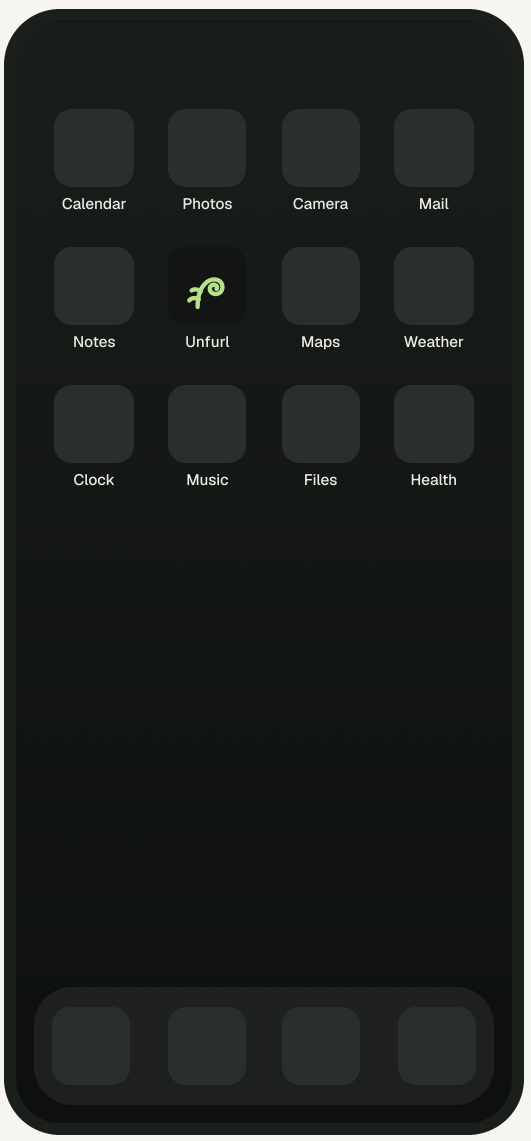

iOS dark icon: sprout mark on #121513

App Store listing row



Unfurl: Life Tracker by Voice
Habits, money, gym and tasks
Get

Notification



Unfurl · now
Fern: 2 things left today. Tell me what happened or ask me anything.

Icons stay flat (ADR-0019): white mark on solid moss, or the sprout mark on #121513 for the iOS dark icon. Neighbouring icons are neutral placeholders.

Brand sheet

Logo

unfurl

unfurl

unfurl

Clear space is half the mark's width on every side. Smallest mark 16 pt. Mark height is 1.1× the wordmark.

unfurl

Don't

unfurl
Gradient

UNFURL
Capitals

unfurl
Rotated

unfurl
Recoloured, shadow

Colour

background #f6f5f1 · Paper ground	foreground #1b1f1c · Ink	primary #1f5a43 · Moss: the one brand colour
muted-foreground #5c625d · Secondary text	moss #1f5a43 · Logo and the deep end of Fern's orb	frond #3b8a5a · Fern only
sprout #a6d277 · Fern only; mark on dark	mist #e9f0ea · Fern's reply bubbles	

Data colours: charts, dots and icons only, never text

hab tsk fit nut fin life foc scr

Moss marks one thing per screen. Fern's four greens belong to Fern alone, so Fern is always the most colourful thing in the interface.

Type

Today page-title 28

Push day title 20

Logged ₱250.00 for lunch. body 16

Amount caption 13

142.5 kg num-display 64 · share cards

82 num-xl 40 · in the app

₱1,240.00 num-lg 26

3 × 8 @ 60 kg num-md 16

In the app: Geist for words, Geist Mono for numbers in rows and records. On share artwork: Geist only, numbers in Geist 600 with tabular figures. 400 to read, 500 for controls and labels, 600 for titles. Sentence case everywhere; nothing under 12.

Voice: calm, plain, specific

Say	Not
Say it. It's tracked.	AI-powered life optimisation
Just tell Fern.	What's on your mind? ✨
3 things left today	You're crushing it!!!
Missed yesterday. Today is a new count.	You broke your streak.
For scattered days	Treats ADHD
₱3,480.00 on food, ₱420.00 less than last week	Great job saving!

3 · Campaign: selling points and pain points

What Unfurl says and why. Each selling point starts from a pain the lead segment (busy working adults, 22 to 35) already feels, in their own words, and ends on proof that exists in the app today. The real competitor is not YNAB; it is stopping. Prices are the US list prices in the positioning document. The word "AI" is not a headline, and nothing claims to treat or manage ADHD.


Selling points and the pain each one answers

Selling point	The pain, in their words	Why it hurts	Proof in the app	Headline
One sentence logs anything	“Logging takes longer than the workout.”	Forms and screens per entry are why people stop by week three.	Text, voice or photo; Fern files it to the right place, with Undo.	**Say it. It's tracked.**
One app, not five	“I pay for five trackers and use none of them.”	A typical stack (YNAB, MacroFactor, Strong, Todoist, Habitify) costs about US$311 a year.	Habits, tasks, training, food, body, money, journal and focus in one place; Plus is US$49.99 a year.	**Every habit, rep, task and peso.**


Selling point	The pain, in their words	Why it hurts	Proof in the app	Headline
Your records answer back	“My data is in five apps and I still can't tell how I'm doing.”	A general chatbot keeps no records; single-purpose apps keep them in separate screens.	Ask Fern: "When did I last train legs?" The answer comes from your records, with the chart.	**Ask, don't dig.**
See the whole of you improve	“I can't see if I'm actually getting better.”	Five apps give five partial pictures and no single trend.	One Life Score across every area, weekly and daily reviews, charts on everything.	**Measure it. Watch it unfurl.**
Nothing finishes silently	“I broke a streak and quietly gave up.”	Most trackers say nothing about a win and nothing kind about a miss.	Fern celebrates every win, shows the cost of a miss, and offers the next step.	**Fern notices.**
Progress worth posting	“Nobody sees the work.”	Screenshots of tracker screens are ugly, so wins stay private.	Every record, streak and sealed day makes a share card in 4:5, 1:1 or 9:16.	**Share the wins.**

Pain → fix: six feed posts, one per selling point


The user's sentence comes first, struck through by what Unfurl does instead. Rotated across the three grounds.

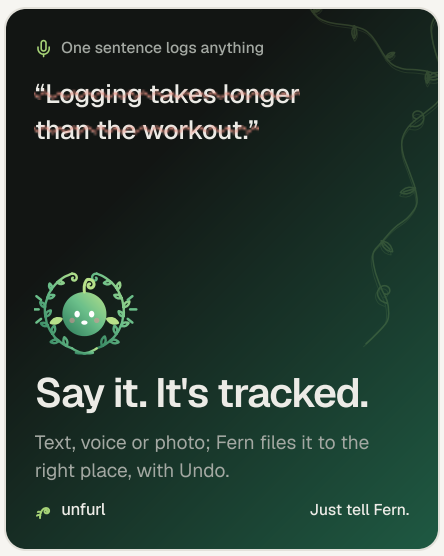


Pain → fix · Feed 4:5 · “One sentence logs anything”

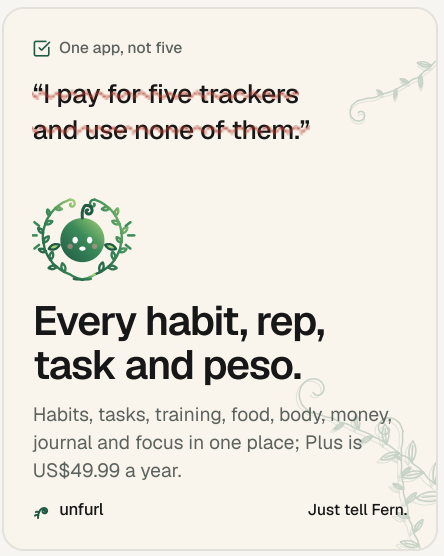


Pain → fix · Feed 4:5 · “One app, not five”

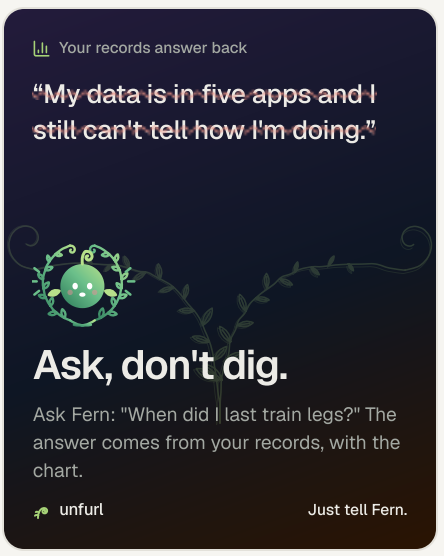


Pain → fix · Feed 4:5 · “Your records answer back”

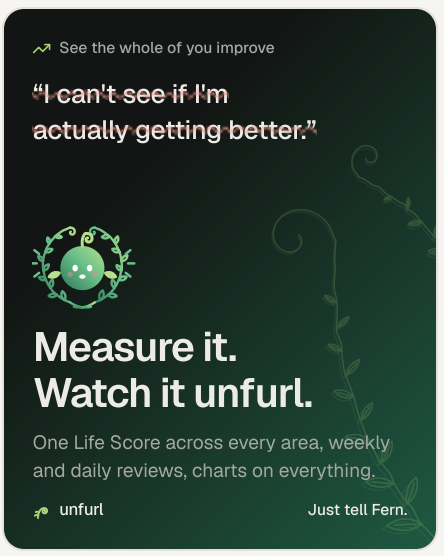

Pain → fix · Feed 4:5 · “See the whole of you improve”

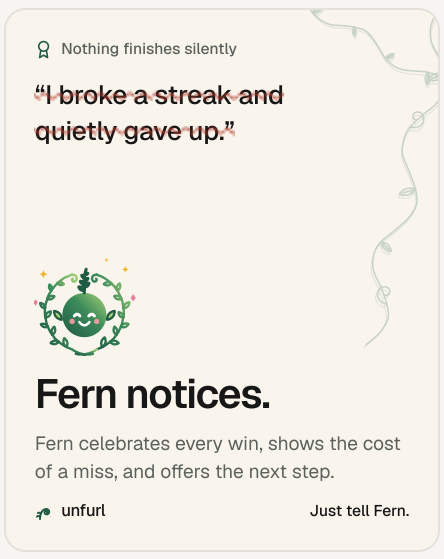


Pain → fix · Feed 4:5 · “Nothing finishes silently”

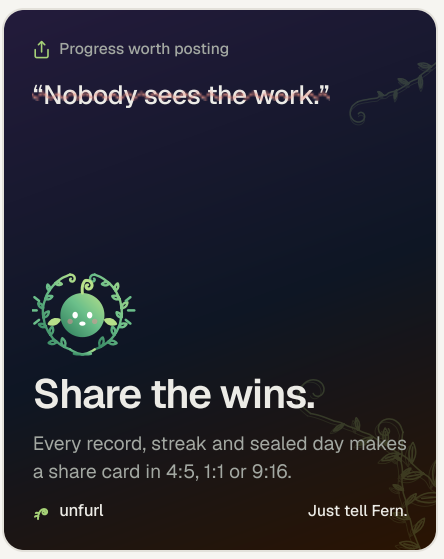


Pain → fix · Feed 4:5 · “Progress worth posting”


Comparison, before-and-after, and campus

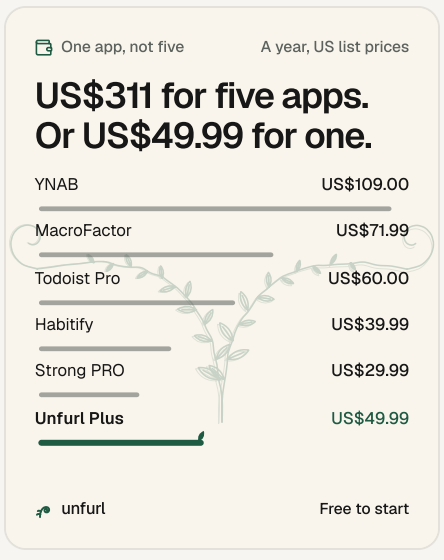

Comparison · Feed 4:5 · the stack against one app

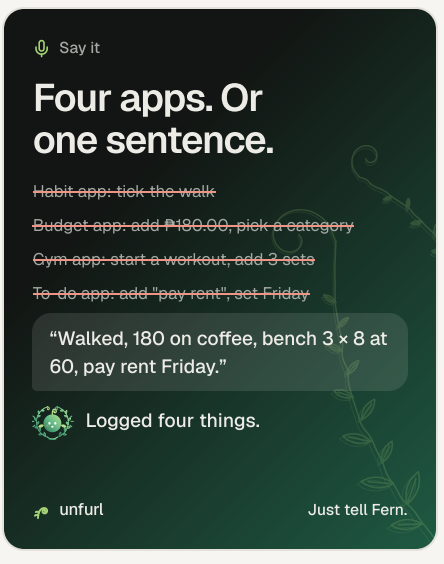


Before and after · Feed 4:5

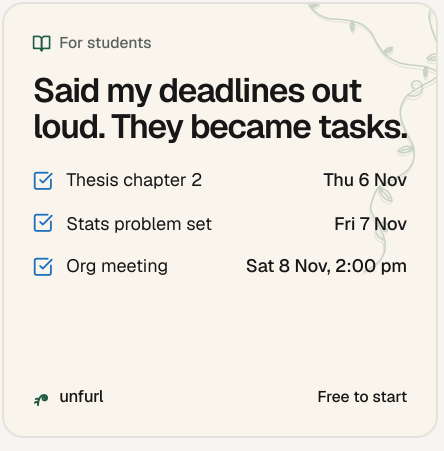


Campus · Square 1:1


Story ad: hook, demo, call to action

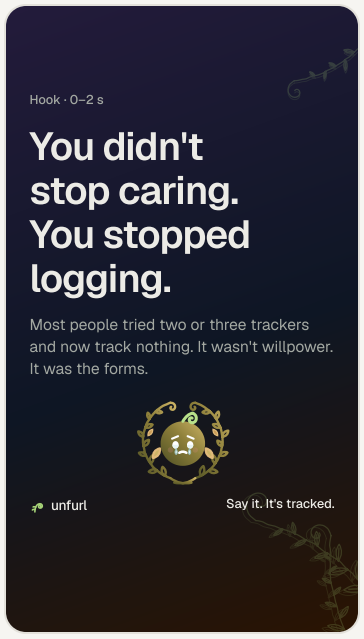

Story 9:16 · hook

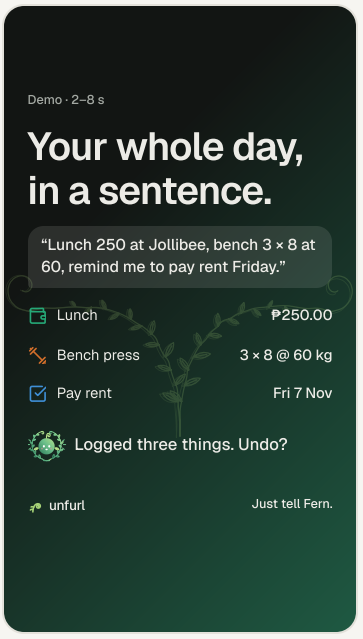


Story 9:16 · demo

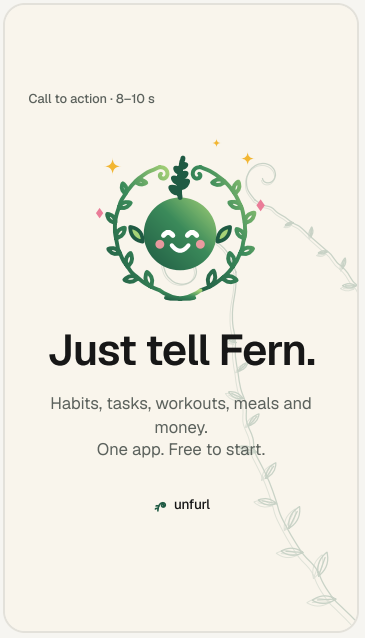

Story 9:16 · call to action


15-second video, frame by frame

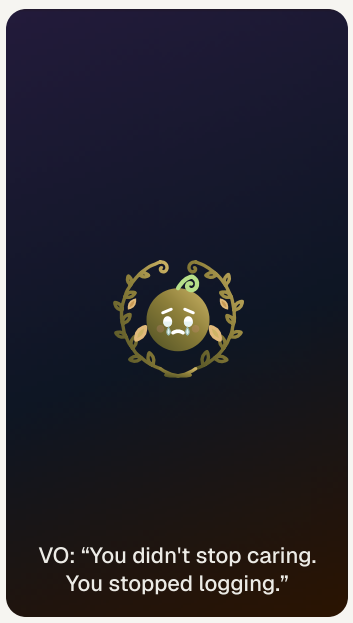

0–2 s

Five tracker icons fade from a home screen, one by one.


VO: “You didn't stop caring. You stopped logging.”

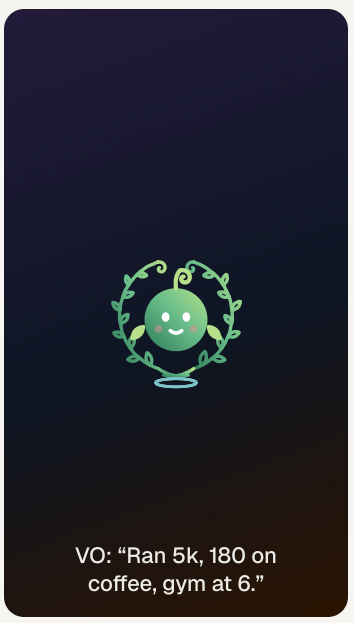

2–5 s

Thumb holds the mic. Waveform. Fern listens.


VO: “Ran 5k, 180 on coffee, gym at 6.”

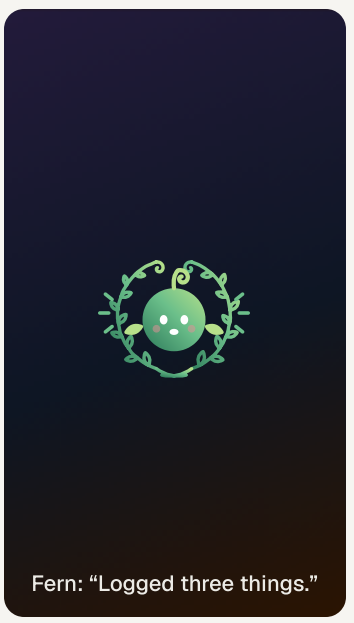

5–8 s

Three records drop into Today. "Undo" glows once.


Fern: “Logged three things.”

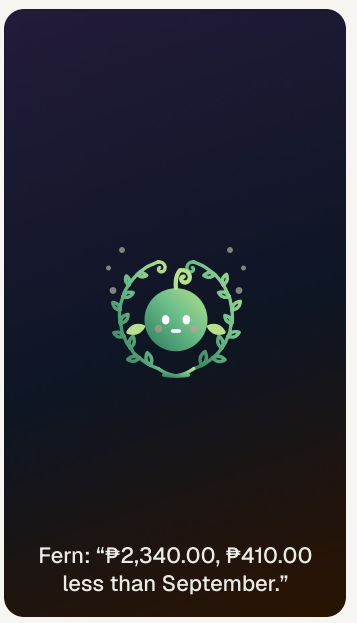

8–11 s

"How much did I spend on coffee this month?" A chart draws.


Fern: “₱2,340.00, ₱410.00 less than September.”

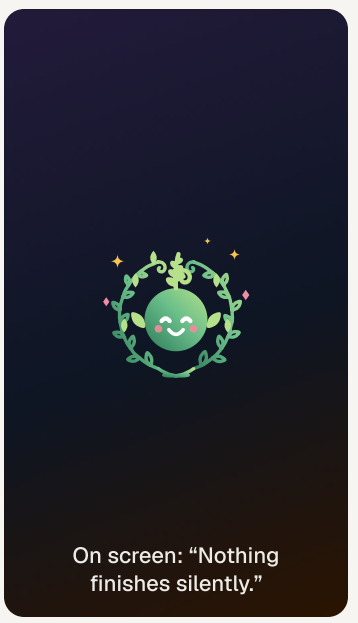

11–13 s

Streak card: 23 days. Fern unfurls, leaves lift.

On screen: “Nothing finishes silently.”

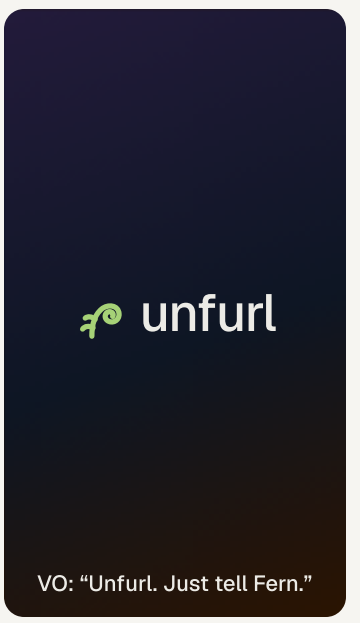

13–15 s

The Unfurl logo and the App Store badge. No Fern.

VO: “Unfurl. Just tell Fern.”

Landing page

unfurl Features Pricing Get the app

The life tracker you talk to

Say it. It's tracked.

Tell Fern what happened, by text, voice or photo. It lands in the right place: habits, tasks, workouts, meals and money. Ask anything and the answer comes from your own records.

Just tell Fern

Free to start · Plus US$49.99 a year



Say it. It's tracked.
Text, voice or photo; Fern files it to the right place, with Undo.

Every habit, rep, task and peso.
Habits, tasks, training, food, body, money, journal and focus in one place; Plus is US$49.99 a year.

Ask, don't dig.
Ask Fern: "When did I last train legs?" The answer comes from your records, with the chart.

Measure it. Watch it unfurl.
One Life Score across every area, weekly and daily reviews, charts on everything.

~~"I pay for five trackers and use none of them."~~

Unfurl replaces them with one, for less than the cheapest two.

Landing page, laptop width: hero, four selling points, the pain line

4 · Fern, the chat character

Final: C1, chosen by Kai on 3 November 2026. Fern is a small round character whose body is the gradient orb, with a fiddlehead curl growing from its head and two leaflet arms, crowned by a wreath of two hand-drawn fronds. Nothing fills the circle behind it (the soft glow disc was removed on 3 November), and each mood carries a small semantic colour: gold sparkles for a win, wilting for a miss (body and wreath dry to olive and straw, dry leaves fall, a dewdrop tear), pond ripples under Fern while listening, fern spores drifting up while thinking. Fern is the chat character: it appears in chat, the daily and weekly reviews, "Ask Fern" answers and as an illustration in campaign art. The logo is Unfurl's, not Fern's: the flat fiddlehead mark and wordmark sign the app icon, every share card and everything Unfurl publishes (Kai, 3 November 2026). Under reduced motion Fern stands still.

Fern, on stage



Try each state

Arrives | Idle | Listening | Thinking | Speaking | A win | A miss

Every time the chat opens, Fern arrives like this.


☐ Play at half speed

C1 · Wreath sprite ✓ Chosen


Fern is a small round being. Its body is the gradient orb, which only Fern may carry; a fiddlehead curl grows from the top of its head; two leaflets are its arms; the wreath is the crown it lives in. Nothing fills

the circle behind it: the soft glow disc was removed on 3 November. The face is two eyes and a mouth in white, so it reads at 24 px.

Avatar sizes, 24 · 40 · 96 px

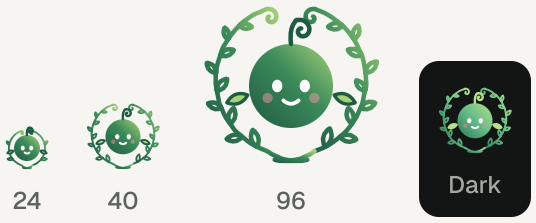

Chat header and centre tab

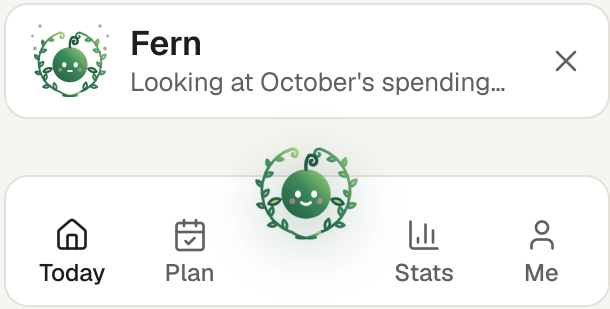


Arriving, on a loop



The wreath draws on from the chin, the body grows in, the curl rolls up, the eyes open, two sprout sparkles twinkle: 1.6 s, then holds.

States, playing on a loop

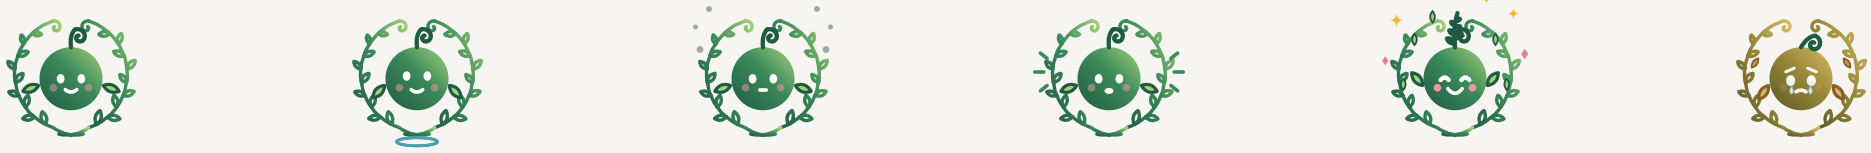

Idle
Breathes (3.6 s), blinks every 4.2 s, the curl sways

Listening
Eyes lift, both arms cup up, the wreath leans in from both sides, the curl perks up, and water ripples spread on the ground below

Thinking
The wreath and the curl draw themselves on, eyes glance left and right, fern spores drift up on both sides

Speaking
Mouth moves, both arms gesture, the wreath sways, green speech lines pulse on both sides

A win
Hops, arms up, cheeks flush, the curl unfurls; gold sparkles and pink gems pop

A miss
Wilts like a thirsty plant: body and wreath fade to dry olive and straw, the curl and arms hang, a dry leaf falls on each side, a dewdrop rolls from each eye


✓ Keeps the orb and gradient (ADR-0019) · A fiddlehead curl on its head, kin to the logo but separate · Wreath ties it to the trophy badges · Moods stay in nature: gold for a win, wilting straw for a miss, spores for thinking · Clearest face at 24 px

⚠ The most "mascot" of the three; the orb now has a face, so the app icon and Fern stop being the identical object.

Fern in the brand

The logo: Unfurl

The flat fiddlehead mark and the wordmark, exactly as ADR-0019 locks them. It signs everything Unfurl publishes: the app icon, share-card footers, posts, the website and social profiles.

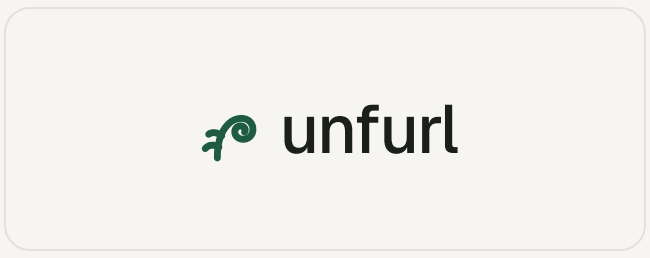


On paper



On the fern ground

The character: Fern

The companion you talk to inside the app. Fern is a person in the product, not the product's name or mark.

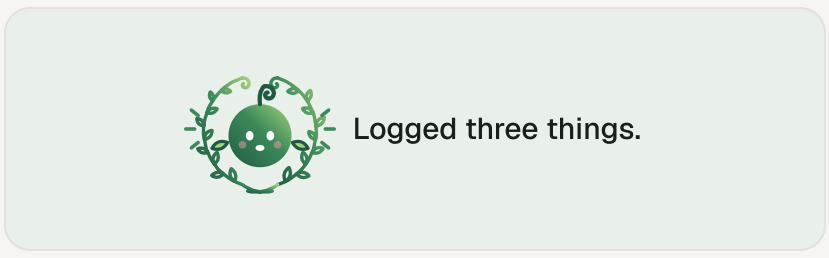


In chat, as the speaker



On dark

Fern's sizes

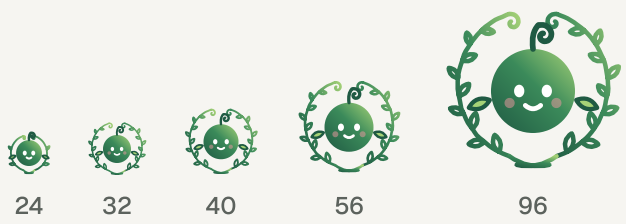

Below 32 px the drawing crops tight and the eyes grow; mood accents drop, the colours stay. 24 px is the floor.

Use and don't


- ✓ Fern appears where the companion acts: chat, the daily and weekly reviews, "Ask Fern" answers, and as an illustration inside campaign art.
- ✓ One Fern per screen, at 24, 32, 40, 56, 96 or 200 px; a quarter of its width clear round the wreath.
- ✗ Never as the logo, the app icon, a share-card footer, a profile picture for Unfurl's social accounts, or a signature on anything Unfurl publishes. Those are the Unfurl logo.
- ✗ Never placed beside the wordmark as if it were the mark, and never merged with the fiddlehead mark.
- ✗ Never recoloured, outlined, boxed, or on a photo without its mist disc.
- ✗ Never celebrating something that did not happen, and never cheering over a miss.

How Fern speaks


Moment	Fern says	Never
After a log	Logged three things. Undo?	Awesome!! Great job logging! 🎉
A win	100th workout. 14,250 kg today, your most this month.	You're crushing it, champ!
A miss	Streak ended at 23 days. Start again today?	Don't worry about it! / You failed your streak.
An answer	₱3,480.00 on food, ₱420.00 less than last week. Thursday was the biggest day.	Based on my AI analysis of your data…
A review	Training carried the week at 92%. Money slipped: dining out was ₱2,100.00 over.	Overall a fantastic week with room to grow!

Fern in the app


Fern explains a chart only when asked, writes the daily and weekly reviews from your records, and listens in chat. Phone width 320 px shown; the app is 390 pt.

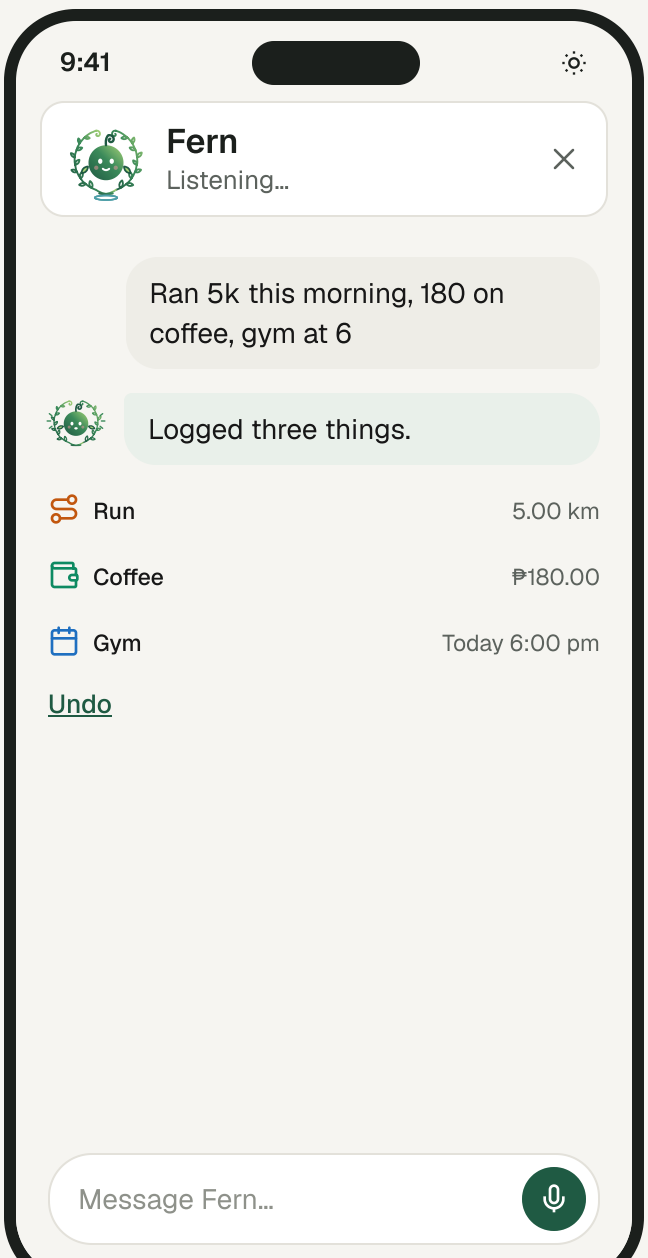


Chat: Fern listening while you speak, then filing what you said.

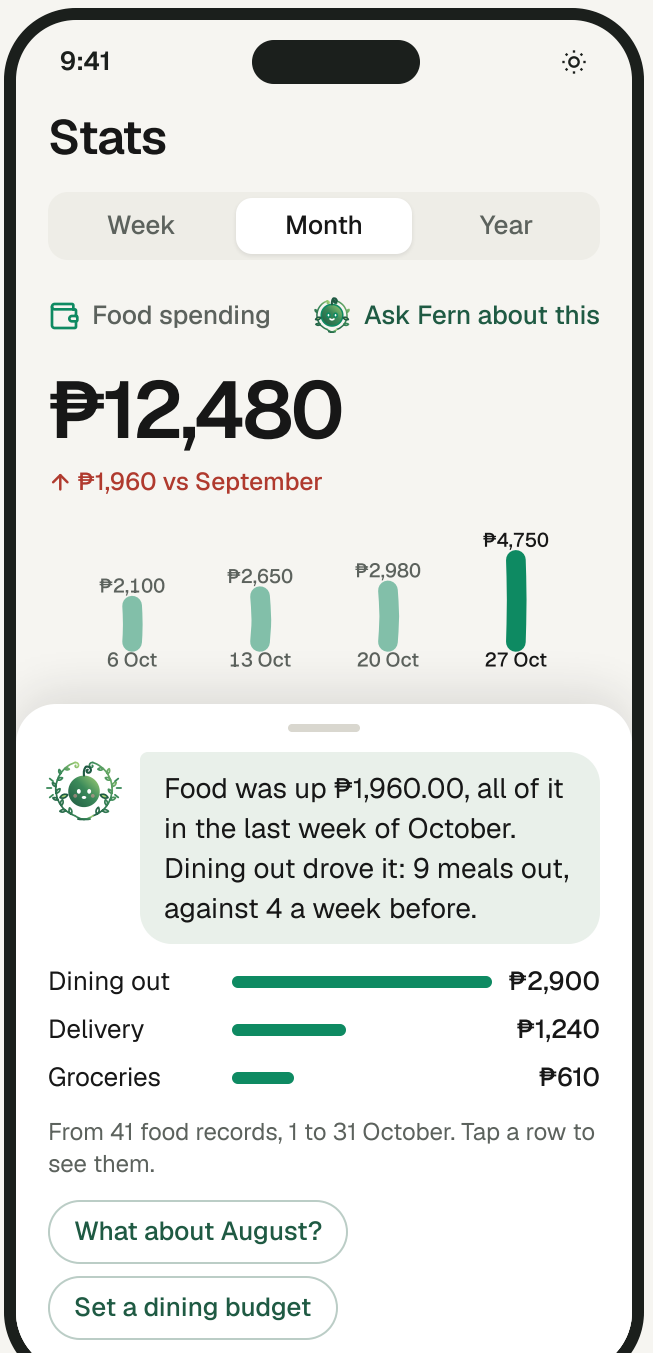

Stats: Fern explains a chart, on demand. Nothing runs until you tap "Ask Fern about this".

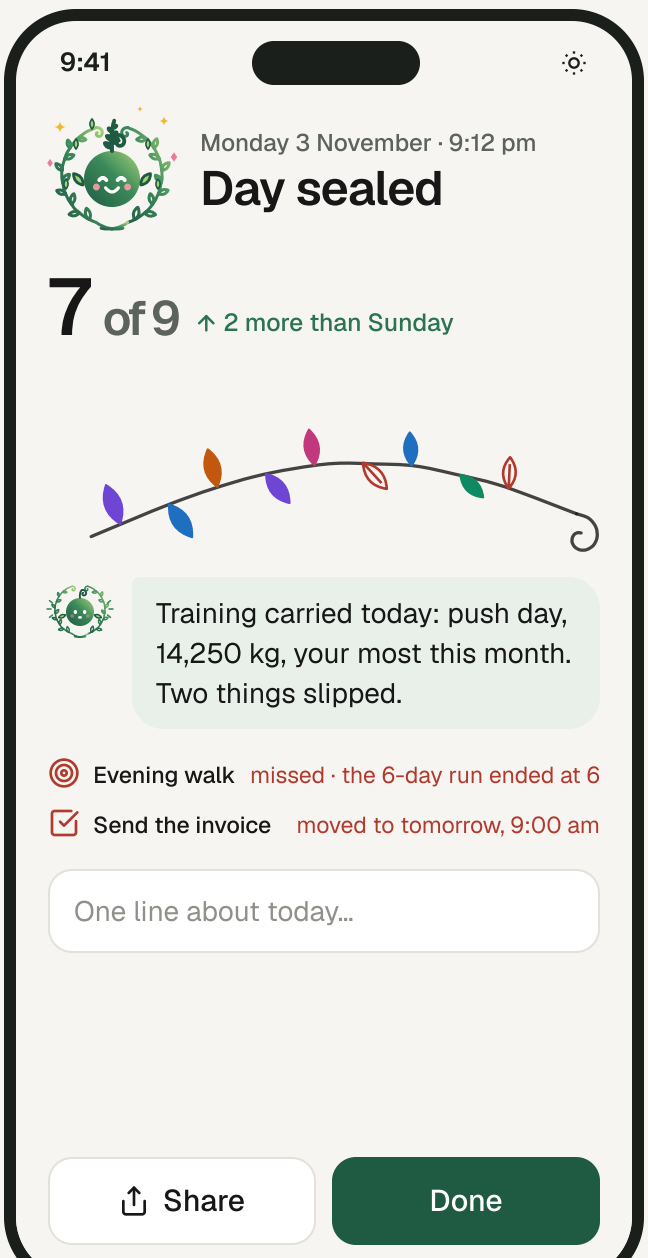

Daily review: opens from the 9 pm reminder or from Today once everything is logged.

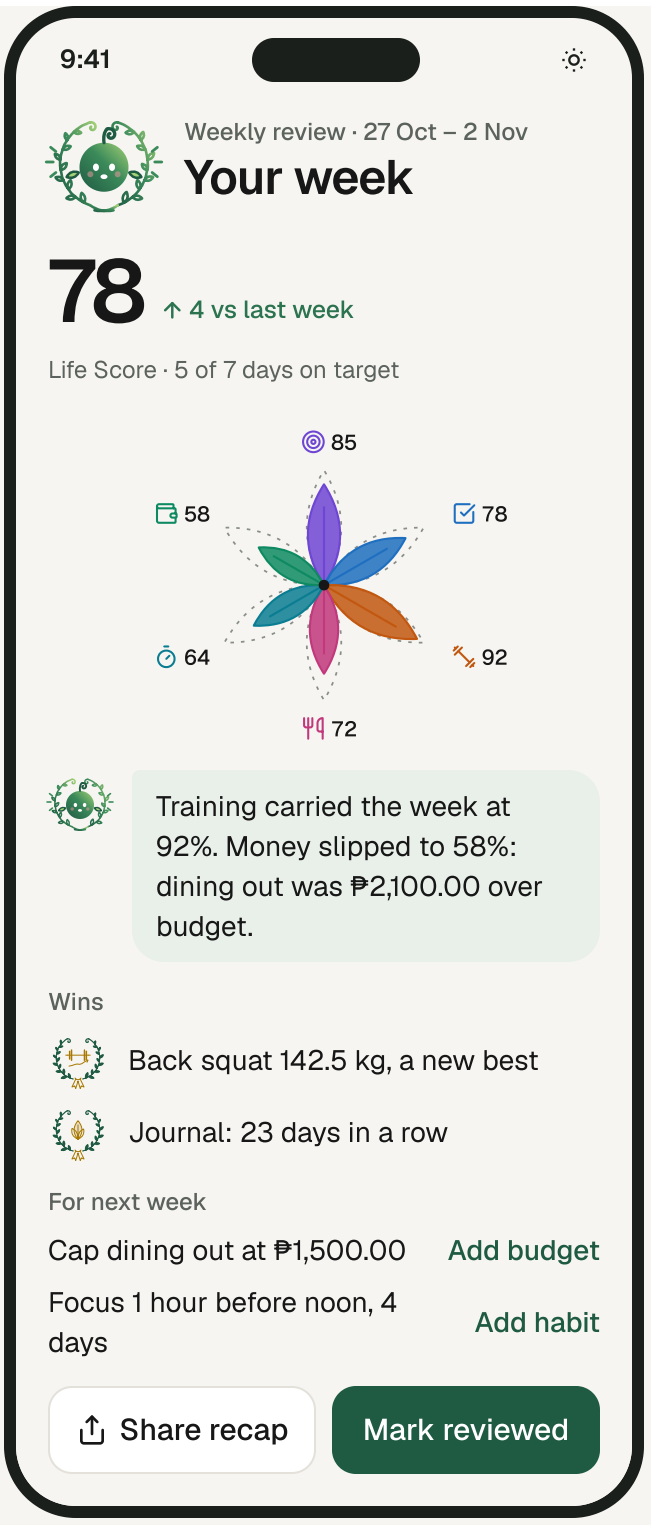

Weekly review: Sunday evening. Fern writes the two sentences; every number comes from your records.

▼ How C1 was chosen: concept art and the options not taken

Concept art, generated with Antigravity

Four briefs, one image each, palette and line style given in the prompt. References for the character, not the shipping artwork.



Seal sprite
The wreath is the body; the curl is the face.



Fiddlehead in a wreath
A creature whose face sits inside its own curl. Drawn below as C4.



Wreath face
The wreath is the face; the curl a forelock.



Unfurling
Mid-celebration: the curl opens, leaves lift.


C2 · Sprout in the wreath ⚠ Trade-off

A small fiddlehead creature standing inside the wreath, which frames it like a halo: a round leaf head with the curl on top, a stem body, leaflet arms and two root feet. The most expressive body; it can point, wave and hop.

Avatar sizes, 24 · 40 · 96 px



Chat header and centre tab

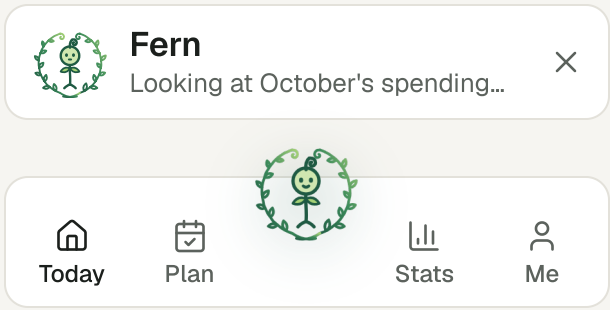


Arriving, on a loop



The wreath draws on from the chin, the body grows in, the curl rolls up, the eyes open: 1.6 s, then holds.

States, playing on a loop

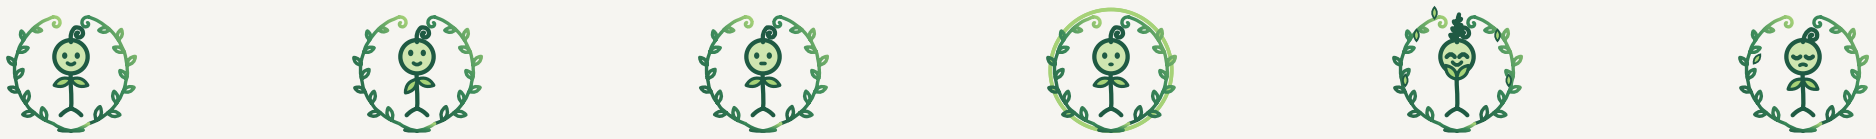

✓ Most expressive pose range · Strong for marketing and stickers

⚠ Thin body lines vanish at 24 px (only the head and curl survive), and there is no gradient, so Fern is no longer the most colourful thing on screen.

C4 · Face in the curl


Trade-off

From Antigravity's second concept: Fern is a fiddlehead standing in the wreath, and its face sits in the centre of the curl, on a small gradient disc. The stem rolls into a spiral around the face, exactly as the logo's fiddlehead rolls; leaflet arms on the stem, root feet below.

Avatar sizes, 24 · 40 · 96 px



Chat header and centre tab

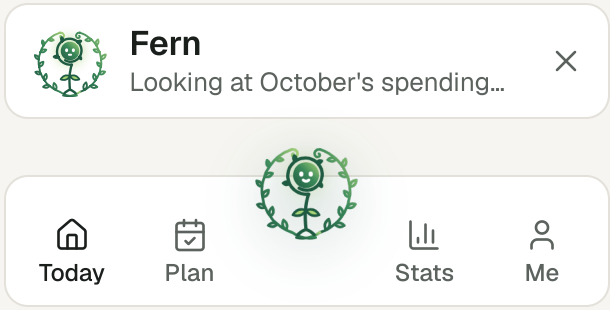


Arriving, on a loop



The wreath draws on from the chin, the body grows in, the curl rolls up, the eyes open: 1.6 s, then holds.

States, playing on a loop

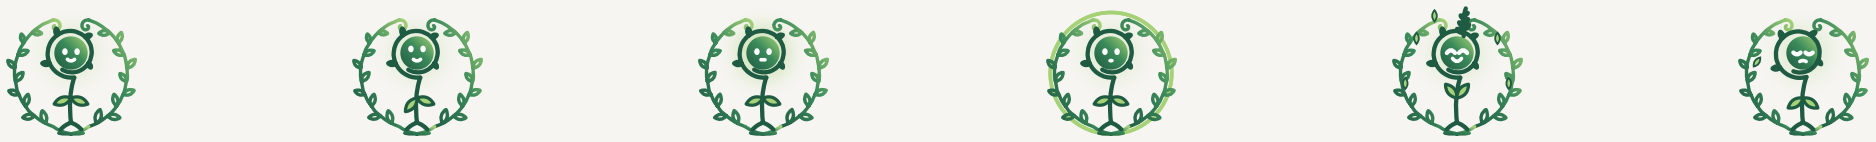

✓ Closest to the logo: the curl is the head · Keeps a gradient (on the face disc) · Thinking draws the spiral round the face


⚠ The face is the smallest of the four (a 15-unit disc), so at 24 px the eyes are two pixels; the wreath plus a tall body reads busier than C1.

C3 · The wreath is the face


Trade-off

The wreath itself becomes a round face: its two fronds are the cheeks and jaw, crossing at the chin; the fiddlehead is a forelock at the top; two small leaves are eyebrows. The closest to C as Kai saw it.

Avatar sizes, 24 · 40 · 96 px

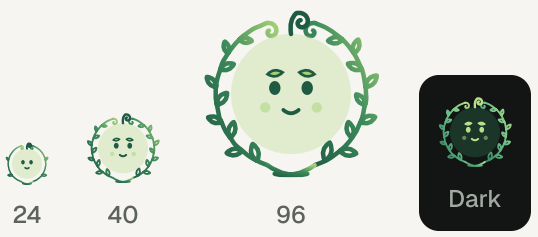

Chat header and centre tab

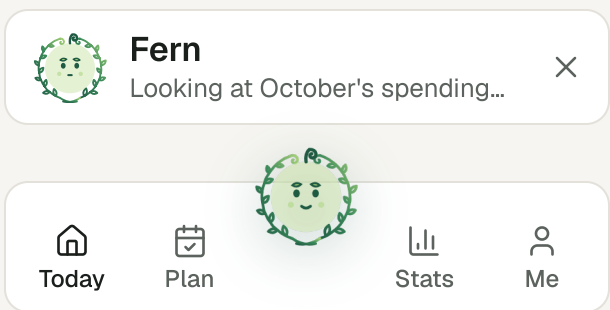


Arriving, on a loop



The wreath draws on from the chin, the body grows in, the curl rolls up, the eyes open: 1.6 s, then holds.

States, playing on a loop

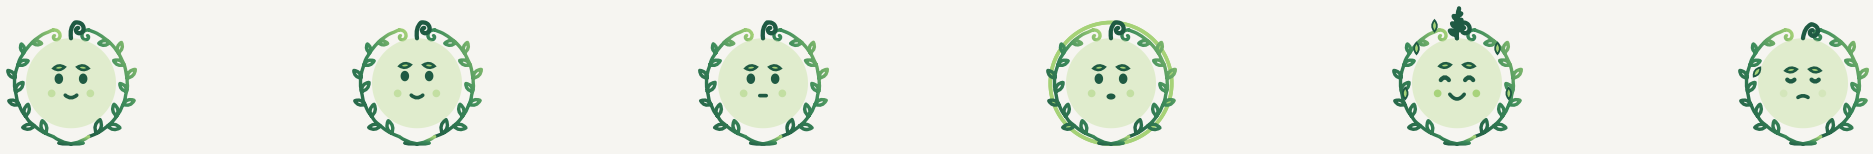

Idle · Listening · Thinking · Speaking · A win · A miss

✓ Closest to C; one object, no extra body · Eyebrows give it the widest range of mood

⚠ Leans on the wreath drawing at every size, so it is the busiest at 24 px; no gradient.

Chosen: C1, the wreath sprite (Kai, 3 November 2026)


- It is C, the seal Kai liked, with a character living inside it: the thing in the middle now has a face, arms and moods.
- It is the only one of the three that keeps what ADR-0019 gives Fern alone, the gradient orb and its glow, so Fern stays the most colourful, living thing on every screen. C2 and C3 are drawn in ink on mist and lose that.
- It reads at 24 px: white eyes on the orb survive where C2's stem body and C3's wreath face blur.
- The motion is the brand acting itself out: the wreath draws on as Fern arrives and thinks, the curl unfurls into a frond on a win, a leaf falls on a miss.
- C2 makes the best sticker and marketing pose and can live on there; C3 is the fallback if Kai wants no body at all.

Round 2 directions A to D


A · A drawn frond in the orb ✓ Recommended

Fern keeps the gradient orb, which only Fern may carry (ADR-0019), and the white mark inside it becomes a hand-drawn frond: one stem, small leaflets, the fiddlehead curl. The line does the acting. Thinking redraws the frond on a loop, speaking sways it, and a win opens the curl into a full frond. It matches the line drawings on every share card.

Avatar sizes, 24 · 40 · 96 px

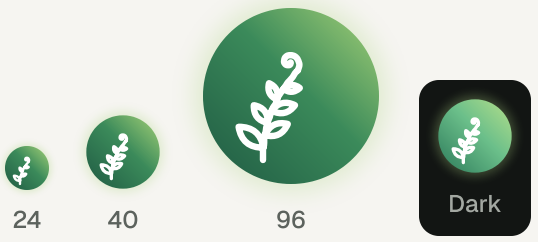

Chat header and centre tab

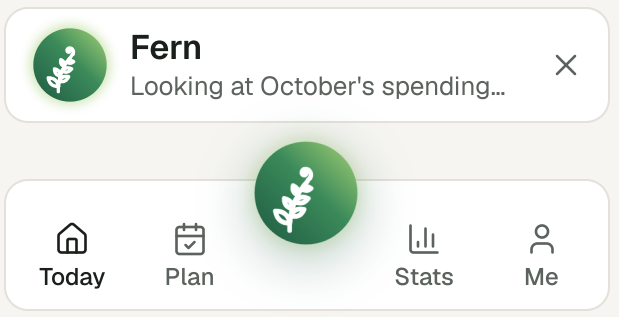

States, playing on a loop



Idle — Slow breath, 1.8 s each way
Thinking — The frond redraws itself
Speaking — Frond sways, halo ripples
Celebrating — The curl opens, leaves lift


✓ Keeps the locked orb and gradient · Same drawing language as the cards and badges · Celebrating is the brand name, acted out

⚠ The frond is no longer the exact logo mark, so "logo = Fern's face" becomes "same family". Needs a one-line amendment to ADR-0019.


B · Leaf, a character ⚠ Trade-off

One leaf drawn in a single line is the face: two dot eyes, a small mouth, a short stem. Expressions do the states: a blink at rest, a tilt and eyes up while thinking, a moving mouth while speaking, two leaves raised like arms when celebrating.


Avatar sizes, 24 · 40 · 96 px

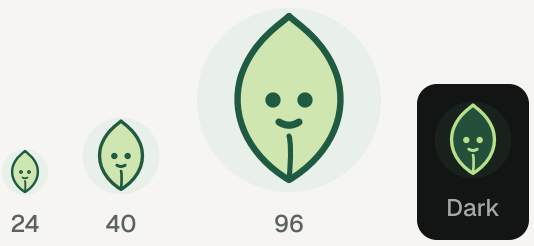

Chat header and centre tab

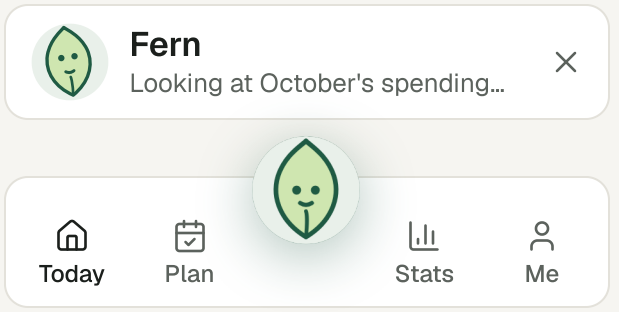

States, playing on a loop

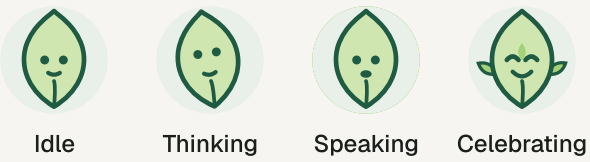

✓ Most readable face · Strongest for stickers and marketing

⚠ Drops the orb, so Fern stops being the most colourful thing on screen, and leans cute against "calm, plain". Needs an ADR change.


C · The wreath seal ⚠ Trade-off

The logo mark in moss, unchanged, inside a ring of two hand-drawn fronds. Thinking draws the ring on a loop; speaking makes it breathe; a win opens the mark into a full frond inside the wreath.


Avatar sizes, 24 · 40 · 96 px



Chat header and centre tab

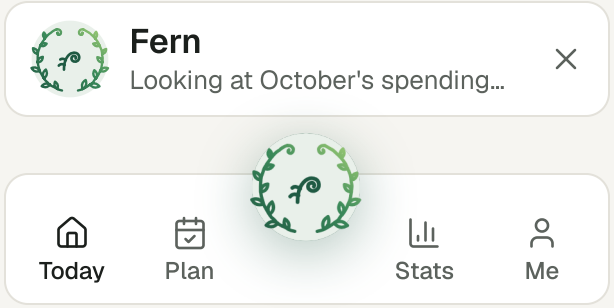

States, playing on a loop

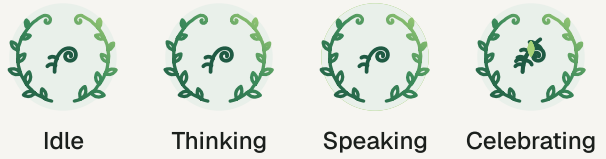

✓ Logo mark stays exactly the same · Pairs with the trophy badges


⚠ At 24 px the wreath leaves blur into a ring; no gradient, so it loses "Fern first".

D · The vine F


⚠ Trade-off

An F grown as a vine on the orb: the upright is a stem, the arms are leafy shoots, the top ends in a curl. Reads as a letter at any size.


Avatar sizes, 24 · 40 · 96 px

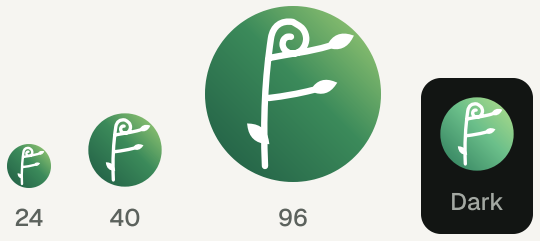

Chat header and centre tab

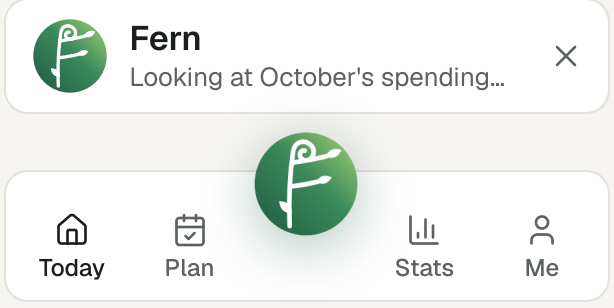

States, playing on a loop

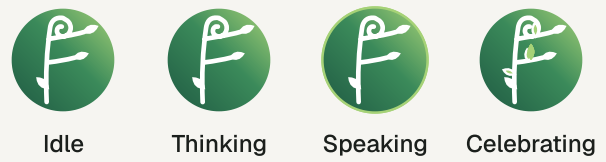

✓ Sharpest at 24 px · Works as a monogram on merch

⚠ A letter, not a plant: it names Fern rather than showing the frond, and drifts from the logo.

Self-review

Revised after Kai's review of 3 November. Rendered at 375, 820 and 1,040 px and measured with the RSPH layout probe in the browser; every card type was also read by eye at 250 px and one at 480 px.

- Version 10, after Kai: "Does a fern turn blue when sad? It should be tied to nature." The miss state now wilts like a thirsty plant: body and wreath fade from green to dry olive and straw and recover, the head curl and the arms hang, two dry amber leaves fall one after the other, and the tear is a clear dewdrop instead of blue. No blue anywhere in the miss. Every other moving state balanced on the centre line too (Kai: "everything seems unbalanced"; arrives and the win kept as they were): thinking shows fern spores drifting up in mirrored pairs, speaking pulses speech lines on both sides with both arms gesturing, and the miss rolls a dewdrop from each eye with a dry leaf falling on each side. Listening redrawn to be balanced in the middle of a screen (Kai): both arms cup up, the wreath leans in from both sides, the curl perks up, and pond ripples spread on the ground beneath Fern instead of sound waves on one side.
- Version 9: the wreath crown is back (version 8 removed it by mistake; Kai meant only the filled circle behind Fern). The soft glow disc behind the body and the speaking halo ring stay removed. Mood accents moved outside the wreath so they never sit on the leaves; on a miss the wreath drains to slate with the body.
- Version 8, after Kai asked to drop the green circle and give each mood its colour: the glow disc behind Fern removed. Mood accents in semantic colours, Duolingo-style: a win gets gold sparkles, pink gems and flushed cheeks; a miss drains the body from green to slate, wells the eyes with blue tears, drops one tear and a wilted amber leaf, and tilts the brows up into worry; listening shows blue sound waves at the cupped arm; thinking shows grey thought dots rising; speaking shows green speech lines. Every state frozen mid-motion and read by eye at 200, 100, 40 and 28 px on light and dark. Below 32 px the accents drop and only the colours (drain, tears, blush) remain. Not checked: colour contrast of the tear blue on the slate body at 24 px on a real phone.
- Version 7, after Kai's ruling that the logo is Unfurl's, not Fern's: share-card footers are back to the flat mark and wordmark on every card; the brand rules now set the logo and Fern side by side as two separate things; the video's end frame is the logo; the table of contents and the section heading no longer use the logo mark to stand for Fern; the ADR-0019 wording and decisions are corrected.
- Round 4 (Fern everywhere, app reviews, campaign): measured with the layout probe at 375, 820 and 1,040 px with every folded section open. Result: no sideways scroll and no spilled or clipped text. The only overlaps are the 25 inside the old "Today" card reproductions, the same as round 2. Each post and story was checked for content overflowing its frame, and every frame fits. Fixed along the way: share posts losing their content to the card fit rule (campaign posts are now exempt and sized to fit), the hook story squeezing Fern, the pain line too faint to read (now full ink with a wavy strike), missing kicker icons, and the voice table without rules. Not checked: Philippine prices (the ads use US list prices), and the phones at the app's real 390 pt width.
- Round 3 (Fern as a character): four characters drawn from C, each checked at 24, 40, 96 and 200 px in light and dark, every state frozen mid-motion and read by eye. Fixed in the loop: a name clash that stopped the page script, concept captions laid out side by side, a gap under the wreath (the stems now cross under the chin, as on the badges), and C1's face too small at 24 px (the wreath pulls in and the eyes grow below 32 px). Layout probe on the Fern section at 375, 820 and 1,040 px: no overlaps, spills, clipped text or sideways scroll. Not checked: the animations on a real phone at 60 fps, and the generated images at full 1,024 px (shown at 640 px).
- Kai's points, each addressed: boxes removed (no tiles, chips or pills on any card); Geist type on every card, Geist Mono gone from the artwork; the accent bar removed; a chart on every card that has data; the hexagon replaced by six leaves; the trophy centred and drawn as a badge, with seven more badges; the line language applied to backgrounds, charts, badges and all four Fern directions; "Label" placeholders replaced by real labels.

- The old "Today" reproductions are folded away under "Today's card in the app", so they are not mistaken for proposals. They keep the accent bar and boxed tiles on purpose: that is the app as it is.
- Final probe: no sideways scroll, no spilled or clipped text, no rows without room to spare, and no overlapping text in the proposed designs at 375, 820 or 1,040 px. The only overlaps left are inside the folded "Today" reproductions (a value over its label in the old boxed tiles), which is one of the reasons for the change.
- Found and fixed in this round: hero numbers whose glyph boxes touched the change line below; chart labels anchored in the middle when they needed the left edge ("Best before" was cut off); the milestone end label cut off at the right; the savings plan line hidden under the actual line; badge wreaths drawn as a V instead of a ring; the leaf face and wreath directions too dark to read on the dark theme; social post rows that lost their spacing.
- Fit rule changed so the chart is the last thing to go: sub line, then figures, then the win line, then optional chart parts (the route on a run, the legend on day sealed). On normal data, square cards keep their chart.
- Not checked: contrast of every data colour on every gradient stop; leaf calendars at 12 px leaves on a phone held at arm's length. Fonts load from Google Fonts; offline the page falls back to system fonts.